

COBRA DX 2000 A PLUS

Dry screw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Version in illustration with cabinet, standard version comes without cabinet

Plug&Pump

Easy to install, user-friendly thanks to a control panel with touch screen and intuitive user interface

Cost savings

Reduced energy consumption with ECOTORQUE Drive, minimized operating costs, minimal maintenance thanks to dry screw vacuum technology

High performance

High pumping speed, two COBRA NX 0950 A on a common base frame with single control unit

Accessories, spare parts and options

- Speed or pressure control
- Water cooling or air cooling system
- Barrier gas system
- Iot Kit
- Cabinet
- Electro-pneumatic inlet valve
- Dilution gas valve
- Industrial quick connector
- Main switch
- Xylan-Defric coating
- Outlet silencer
- Remote control package with communication ports for quick connection and monitoring of the pump

COBRA DX 2000 A PLUS


Dry screw vacuum pump




VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

Dimensional drawing

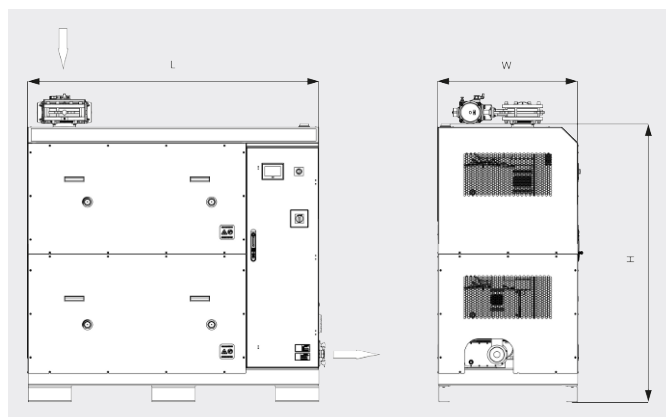

Pumping speed
Air at 20°C. Tolerance: $\pm 10\%$

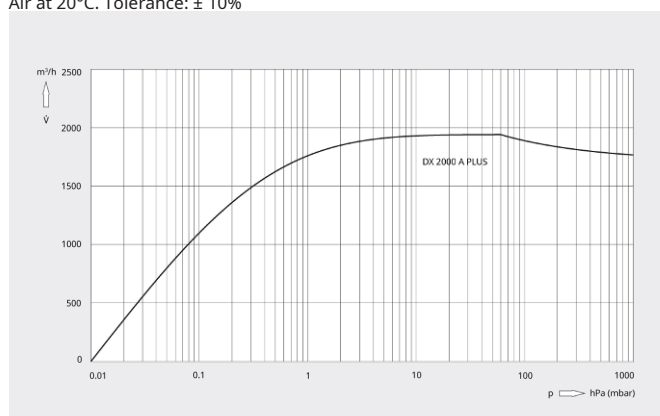

COBRA DX 2000 A PLUS	
Nominal pumping speed	1900 m³/h
Ultimate pressure	≤ 0.01 hPa (mbar)
Nominal motor rating	2 x 18.5 kW
Nominal motor speed	4320 min ⁻¹
Sound pressure level (ISO 2151), KpA = 3 dB	≤ 76 dB(A)
Weight approx.	2750 kg
Dimensions (L x W x H)	2035 x 983 x 1950 mm
Gas inlet / outlet	DN 160 ISO-K / DN 100 ISO-K

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
sales@busch.co.uk or +44 (0)1952 67 74 32



CONTACT FORM



CALL NOW