
# **MINK MA 0018 A**

**Dry claw compressor** 



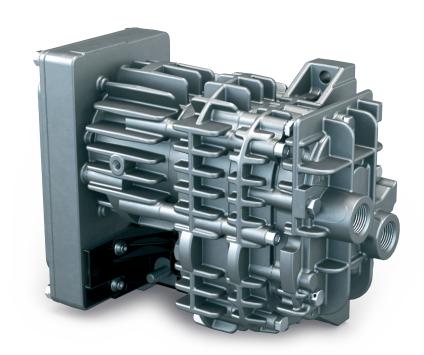

### **Robust**

Specially designed to transport air in mobile applications, may be operated under extreme conditions, in temperature ranges between -40  $^{\circ}$ C and +100  $^{\circ}$ C and at elevations between -1,000 m and 4,000 m, resistant to severe vibration

### **Efficient**

Latest claw compressor technology, dry and contact-free compression, no contamination of pumped medium, intelligent variable speed drive, low energy consumption, long life cycle without servicing

## **Compact**

Small footprint due to "all-in-one" design


www.buschvacuum.com © Busch Vacuum Solutions 05.08.2021 1/2

# **MINK MA 0018 A**


**Dry claw compressor** 



#### Dimensional drawing

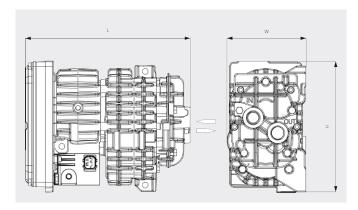

#### Pumping speed Air at 20°C. Tolerance: ± 10%



	MINK MA 0018 A
Volume flow (at inlet)	18 m³/h
Overpressure	0.4 bar(g)
Nominal motor rating	0.5 kW
Nominal motor speed	6000 min <sup>-1</sup>
Ambient temperature	-40 +40
Noise level (ISO 2151)	73 dB(A)
Weight approx.	6.5 kg
Dimensions (L x W x H)	249.5 x 120 x 199 mm
Gas inlet / outlet	G ½"

## **DO YOU WANT TO KNOW MORE?**

Get in touch with us directly! sales@busch.co.uk or +44 (0)1952 67 74 32





CALL NOW

www.buschvacuum.com © Busch Vacuum Solutions 05.08.2021 2/2