

COBRA DX 2000 A PLUS

Dry screw vacuum pump



VACUUM SOLUTIONS



Plug&Pump

Easy to install, user-friendly thanks to a control panel with touch screen and intuitive user interface

Cost savings

Reduced energy consumption with ECOTORQUE, minimized operating costs, minimal maintenance thanks to dry screw vacuum technology

High performance

High pumping speed, two COBRA NX 0950 A on a common base frame with single control unit

Accessories, spare parts and options

- Speed or pressure control
- Water cooling or air cooling system
- Barrier gas system
- Iot Kit
- Cabinet
- Electro-pneumatic inlet valve
- Dilution gas valve
- Industrial quick connector
- Main switch
- Xylan-Defric coating
- Outlet silencer
- Remote control package with communication ports for quick connection and monitoring of the pump


COBRA DX 2000 A PLUS

Dry screw vacuum pump




VACUUM SOLUTIONS

Dimensional drawing

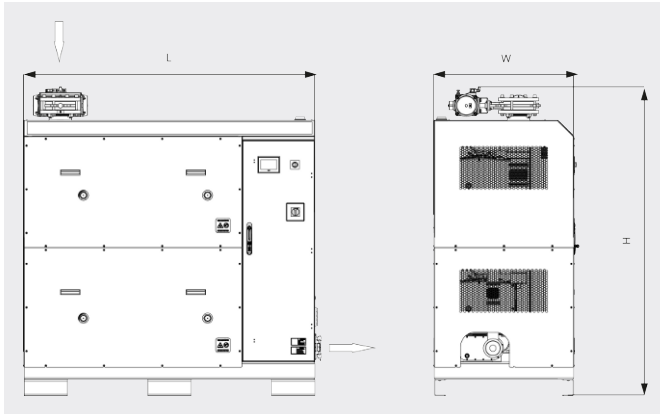

Pumping speed

Air at 20°C. Tolerance: ± 10%

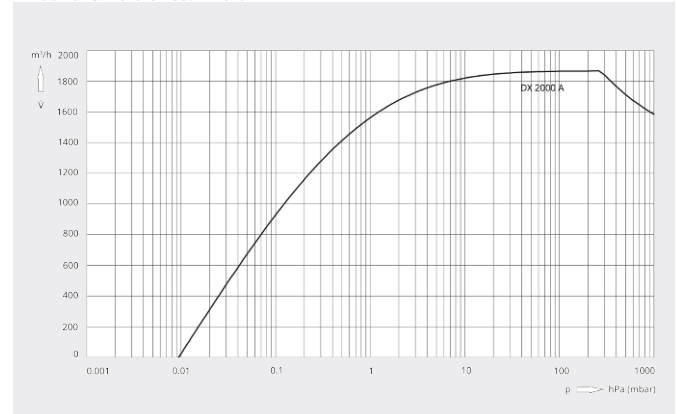

| COBRA DX 2000 A PLUS | |
|--|-----------------------------|
| Nominal pumping speed | 1900 m³/h |
| Ultimate pressure | ≤ 0.01 hPa (mbar) |
| Nominal motor rating | 2 x 18.5 kW |
| Nominal motor speed | 4320 min ⁻¹ |
| Sound pressure level (ISO 2151) KpA = 3 db | ≤ 76 dB(A) |
| Weight approx. | 2750 kg |
| Dimensions (L x W x H) | 2035 x 983 x 1950 mm |
| Gas inlet / outlet | DN 160 ISO-K / DN 100 ISO-K |

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
sales@busch.co.uk or +44 (0)1952 67 74 32



CONTACT FORM



CALL NOW