

# COBRA DS 8162/8163 B/F

Dry screw vacuum pumps



VACUUM SOLUTIONS



## High performance

Advanced screw design, excellent running qualities, integrated vacuum booster, perfectly suited for high-capacity load lock and coating processes

## Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient water cooling, high solvent throughput

## Compact

Fit-in-place design, directly mounted canned motor, backing pump and vacuum booster combined on a compact base frame, modular design


# COBRA DS 8162/8163 B/F

Dry screw vacuum pumps




VACUUM SOLUTIONS

Dimensional drawing

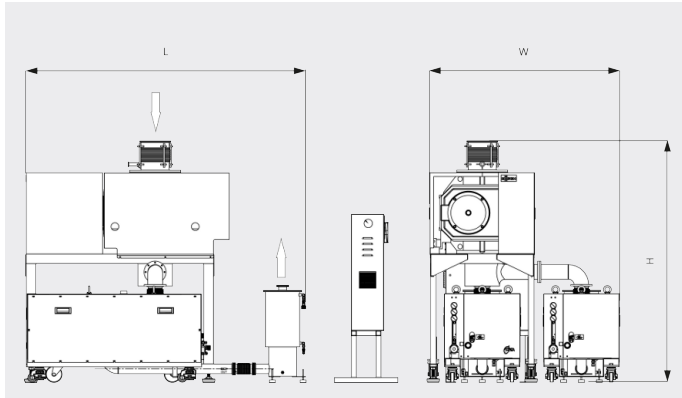

Pumping speed

Air at 20°C. Tolerance: ± 10%

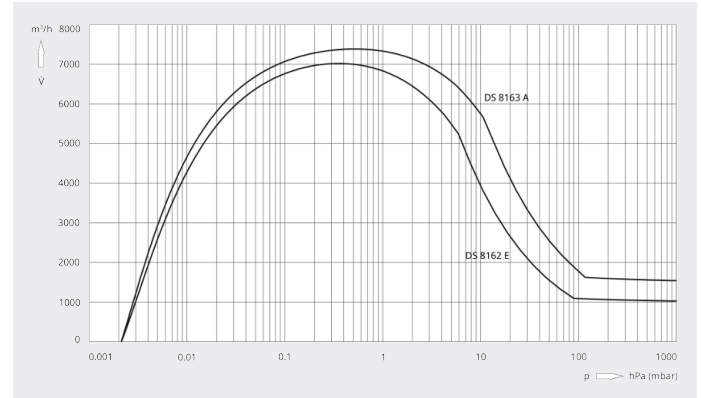

	COBRA DS 8162 F	COBRA DS 8163 B
Nominal pumping speed	4119.5 ACFM	4346.1 ACFM
Ultimate pressure	0.00075 TORR	0.00075 TORR
Nominal motor rating backing pump	2 · 20.1 HP	3 · 20.1 HP
Nominal motor rating vacuum booster	26.8 HP	26.8 HP
Power consumption at ultimate pressure / idle mode	28.2 / 25.5 HP	40.2 / 37.5 HP
Nominal motor speed backing pump	3600 RPM	3600 RPM
Nominal motor speed vacuum booster	3600 RPM	3600 RPM
Noise level (ISO 2151)	< 78 dB(A)	< 78 dB(A)
Water consumption	22 l/min	31 l/min
Nitrogen consumption	2 · (0 – 200) l/min	3 · (0 – 200) l/min
Weight approx.	5500 Lbs.	7304 Lbs.
Dimensions (L x W x H)	63.1 x 57.9 x 73.2 inches	63.1 x 83.2 x 73.2 inches
Gas inlet / outlet	DN 200 / 2 · DN 63	DN 200 / 3 · DN 63

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[info@buschusa.com](mailto:info@buschusa.com) or +1 757 463 7800



CONTACT FORM



CALL NOW