


# MINK MA 0018 A

Dry claw compressor



**VACUUM SOLUTIONS**

Part of the **BUSCH** GROUP

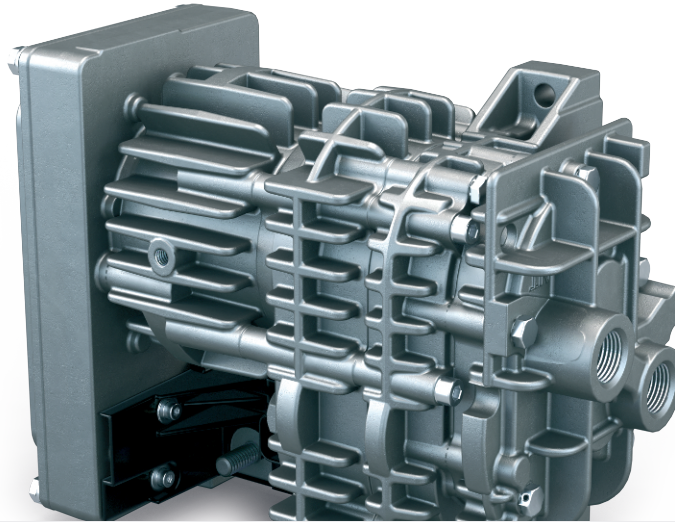

## Robust

Specially designed to transport air in mobile applications, may be operated under extreme conditions, in temperature ranges between -40 °C and +100 °C and at elevations between -1,000 m and 4,000 m, resistant to severe vibration

## Efficient

Latest claw compressor technology, dry and contact-free compression, no contamination of pumped medium, intelligent variable speed drive, low energy consumption, long life cycle without servicing

## Compact

Small footprint due to "all-in-one" design

# MINK MA 0018 A


Dry claw compressor



**VACUUM SOLUTIONS**


Part of the **BUSCH** GROUP

Dimensional drawing

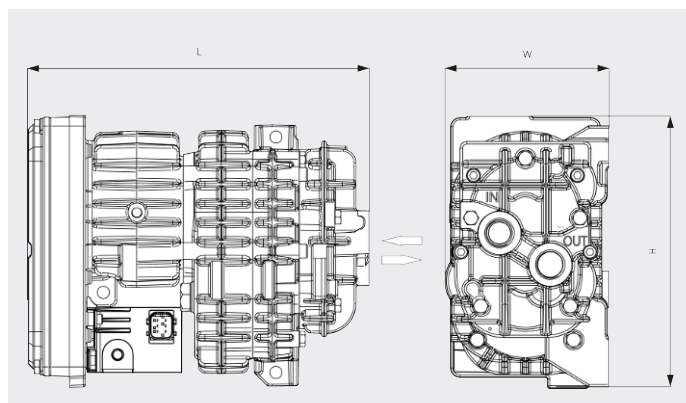

Pumping speed

Air at 20°C. Tolerance:  $\pm 10\%$

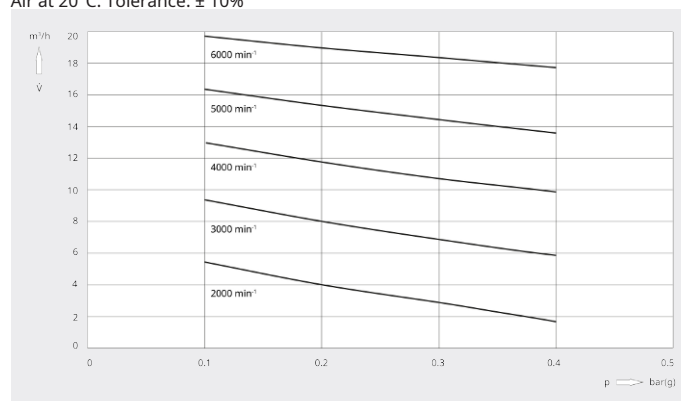

MINK MA 0018 A	
Volume flow (at inlet)	10.6 ACFM
Overpressure	5.8 PSIG
Nominal motor rating	0.7 HP
Nominal motor speed	6000 RPM
Ambient temperature	-104 ... +104 °F
Sound pressure level (ISO 2151), KpA = 3 dB	73 dB(A)
Weight approx.	14.3 Lbs.
Dimensions (L x W x H)	9.8 x 4.7 x 7.8 inches
Gas inlet / outlet	G ½" / G ½"

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

[info@buschusa.com](mailto:info@buschusa.com) or +1 757 463 7800



CONTACT FORM



CALL NOW