

# MINK MI 1502 BP

Dry claw compressors



**VACUUM SOLUTIONS**

Part of the **BUSCH** GROUP



## Flexible

Designed for numerous industrial applications of up to 2.0 bar(g), inlet filter and pressure relief valve as standard

## Reliable

Air cooling, constantly high volume flow throughout the entire life cycle

## Nearly maintenance-free

Dry and contact-free compression

# MINK MI 1502 BP


Dry claw compressors



**VACUUM SOLUTIONS**


Part of the **BUSCH** GROUP

Dimensional drawing

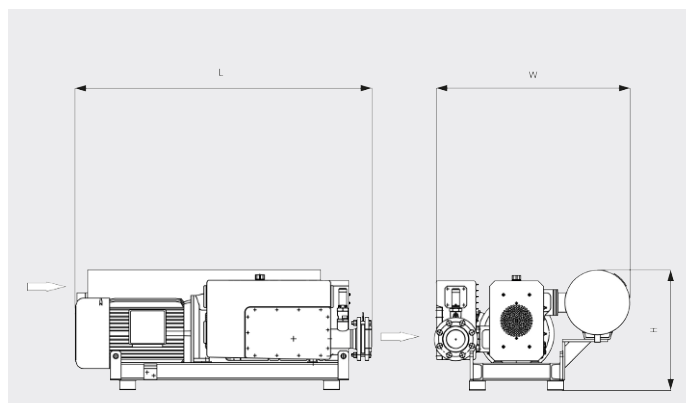

Pumping speed

Air at 70°F. Tolerance:  $\pm 10\%$

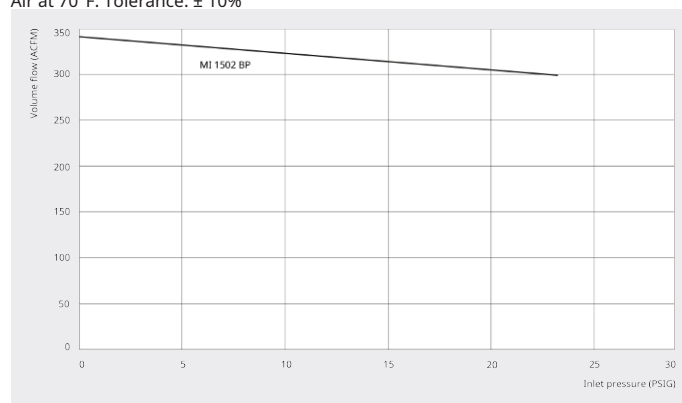

MINK MI 1502 BP	
Volume flow (at inlet)	341.4 ACFM
Overpressure	23.21 PSIG
Nominal motor rating	40 HP
Nominal motor speed	3600 RPM
Sound pressure level (ISO 3744), 1 m distance, at medium load	92 dB(A)
Weight approx.	860 Lbs.
Dimensions (L x W x H)	63.7 x 35.6 x 22.8 inches
Gas outlet	3" NPT

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

[info@buschusa.com](mailto:info@buschusa.com) or +1 757 463 7800



CONTACT FORM



CALL NOW