

MINK MV 0500/0600 B

Dry Claw Vacuum Pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Efficient

Latest claw technology, additional pumping speed thanks to pressure control, up to 20% more performance, low energy consumption, minimized operating costs, nearly maintenance-free

Flexible

Variable speed drive (VSD)

Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations

MINK MV 0500/0600 B


Dry Claw Vacuum Pumps



VACUUM SOLUTIONS


Part of the **BUSCH** GROUP

Dimensional drawing

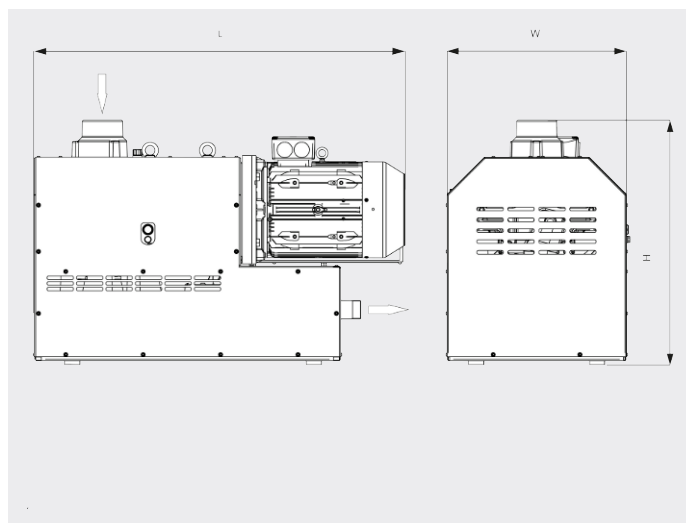

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

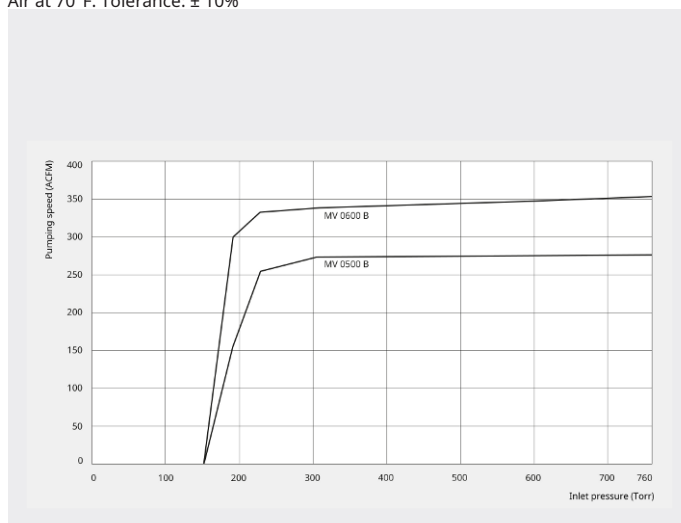

	MINK MV 0500 B	MINK MV 0600 B
Nominal pumping speed	276.6 ACFM	353.1 ACFM
Ultimate pressure	150 TORR	150 TORR
Nominal motor rating	14.8 – 16.9 HP	20.1 – 23.2 HP
Nominal motor speed	1200 ... 3600 RPM	1200 ... 3600 RPM
Sound pressure level (ISO 3744), 1 m distance, at medium load	75 dB(A)	76 dB(A)
Weight approx.	1089 Lbs.	1210 Lbs.
Dimensions (L x W x H)	47 x 22.8 x 31.3 inches	47.2 x 22.8 x 31.3 inches
Gas inlet / outlet	G 3" / R 2"	G 3" / R 2"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW