

R5 RA 0400-0630 C ECOTORQUE

Oil-lubricated rotary vane vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Efficient

Up to 50% energy savings thanks to the variable speed drive (ECOTORQUE), Ecomode with automatic start and stop function

High performance

High pumping speed at low pressures, designed for continuous operation

Flexible

Precise adjustment of vacuum level (pressure control) and pumping speed (speed control) to process requirements, compatible with a wide range of supply voltages, easy control and monitoring of up to eight vacuum pumps with optional ECOTORQUE Master Control

Accessories, spare parts and options

- Single or double gas-ballast valve, manual or solenoid operation
- Various inlet filters
- Various temperature and pressure gauges
- Energy recuperation kit with water/oil heat exchanger
- Vacuum pump oils for all applications

R5 RA 0400-0630 C ECOTORQUE


Oil-lubricated rotary vane vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP


Dimensional drawing

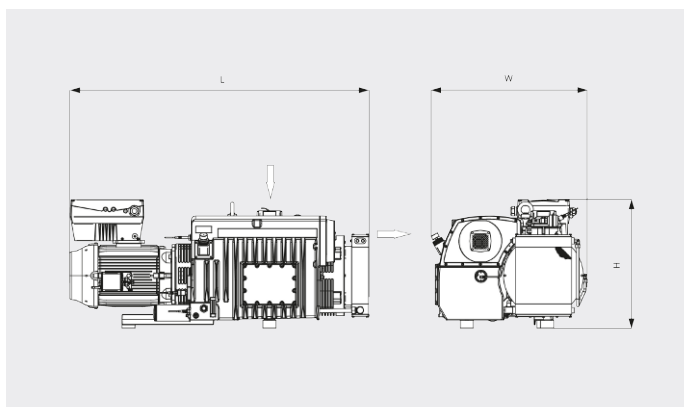

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

___ Min. speed Max. speed

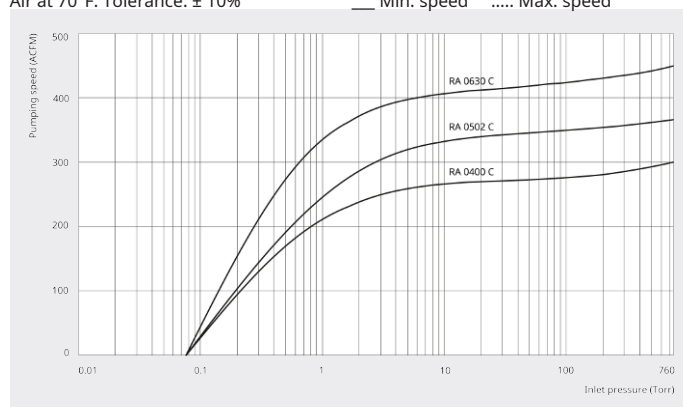

	R5 RA 0400 C ECOTORQUE	R5 RA 0502 C ECOTORQUE	R5 RA 0630 C ECOTORQUE
Nominal pumping speed	164.8 – 282.5 ACFM	194.2 – 341.3 ACFM	229.5 – 438.4 ACFM
Ultimate pressure (Gas-ballast valve closed)	0.075 Torr	0.075 Torr	0.075 Torr
Nominal motor speed	700 – 1200 rpm	700 – 1200 rpm	700 – 1200 rpm
Power consumption at ultimate pressure	4.3 – 6.8 hp	5.4 – 8.6 hp	5.9 – 10.0 hp
Sound pressure level (ISO 2151), KpA = 3 dB	79 dB(A)	79 dB(A)	79 dB(A)
Oil capacity	12.7 qts.	12.7 qts.	15.9 qts.
Weight approx.	1023 Lbs.	1232 Lbs.	1276 Lbs.
Dimensions (L x W x H)	55.9 x 35.5 x 28.5 inches	55.9 x 35.5 x 28.5 inches	66.2 x 34.6 x 28.5 inches
Gas outlet	G 3"	G 3"	G 3"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW