

R5 RA 0520 A

Oil-lubricated rotary vane vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Efficient

Up to 25% more energy-efficient than comparable rotary vane vacuum pumps, low operating costs, high uptime, reduced heat emission

High performance

High pumping speed at low pressure ranges, designed for continuous operation in the rough vacuum range, best-in-class footprint performance ratio

Easy servicing

40% less spare parts, all service-relevant parts on one side, service routine significantly faster, smooth surface design for easy cleaning

R5 RA 0520 A


Oil-lubricated rotary vane vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

Dimensional drawing

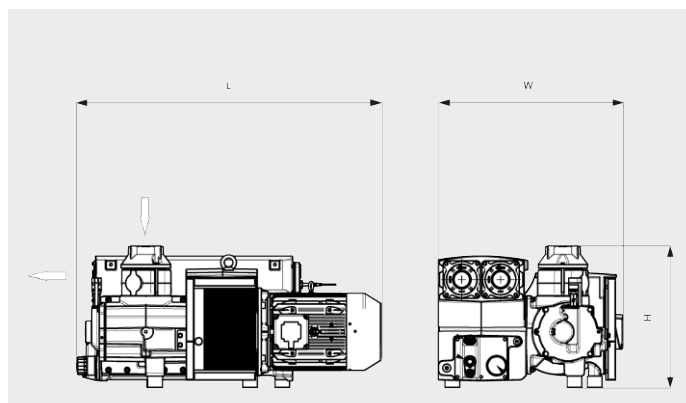

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

___ 50 Hz 60 Hz



R5 RA 0520 A	
Nominal pumping speed	306.0 ACFM
Ultimate pressure (Gas-ballast valve closed)	0.075 Torr
Nominal motor speed	1200 rpm
Power consumption at ultimate pressure	5.8 hp
Sound pressure level (ISO 2151), KpA = 3 dB	76 dB(A)
Oil capacity	11.6 qts.
Weight approx.	930 Lbs.
Dimensions (L x W x H)	49.3 x 28.9 x 22.4 inches
Gas inlet *	G 3"

*Gas outlet G 3" optional

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW