

R5 RB 0021 C

Oil-lubricated rotary vane vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Compact

Reduced height and weight, ideal for installations in confined spaces

Reliable

Robust construction, highly durable fiber-reinforced epoxy resin vanes, proven rotary vane technology, long service life

Flexible

Various design options available, easy adaption to individual customer requirements and processes

Accessories, spare parts and options

- Gas-ballast valve
- Filter pressure gauge
- Vacuum regulating unit
- Various inlet filters
- Vacuum pump oils for all applications

R5 RB 0021 C


Oil-lubricated rotary vane vacuum pumps



VACUUM SOLUTIONS


Part of the **BUSCH** GROUP

Dimensional drawing

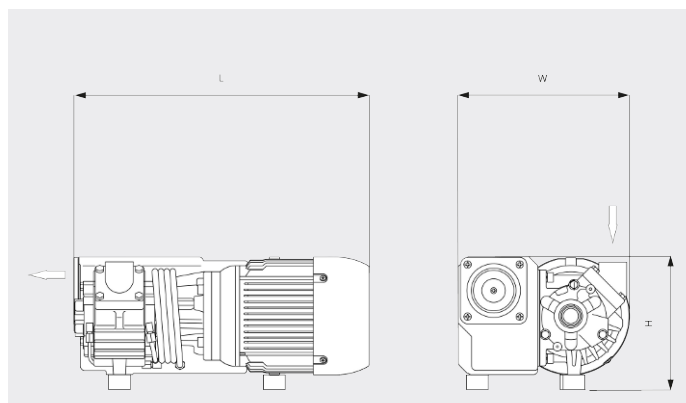

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

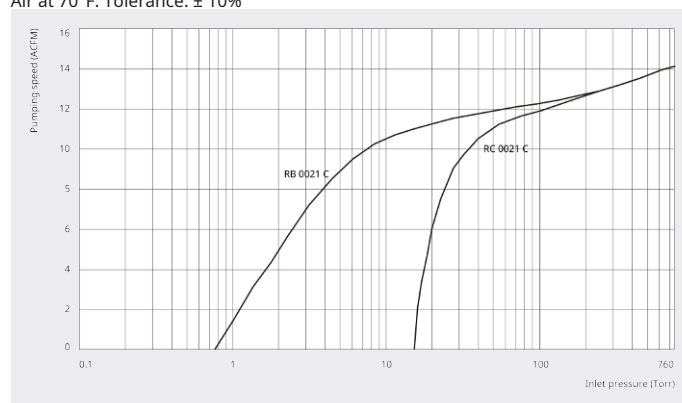

	R5 RB 0021 C	R5 RC 0021 C
Nominal pumping speed	14.1 ACFM	14.1 ACFM
Ultimate pressure	0.75 Torr	15 Torr
Nominal motor rating	1.2 hp	1.2 hp
Nominal motor speed	3600 rpm	3600 rpm
Sound pressure level (ISO 2151), KpA = 3 dB	72 dB(A)	72 dB(A)
Oil capacity	0.5 qts.	0.5 qts.
Weight approx.	44 Lbs.	44 Lbs.
Dimensions (L x W x H)	15.8 x 9 x 7.1 inches	15.8 x 9 x 7.1 inches
Gas inlet	G 3/4"	G 3/4"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW