

R5 RE 0040/0063 C

Oil-lubricated rotary vane vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Explosion-proof

ATEX-certified to directive 2014/34/EU: II 1/2G Ex h IIB3 T4 Ga/Gb, specially designed to extract explosion endangered gas/air and vapor/air mixtures, suitable for the extraction of almost all substances in the IIB3 explosion group as well as petrol vapor

Reliable

Robust construction, highly durable fiber-reinforced epoxy resin vanes, proven rotary vane technology, long service life

Flexible

Various design options available, easy adaption to individual customer requirements and processes, resistance thermometer with transmitter as standard

Accessories, spare parts and options

- Gas-ballast valve
- Oil level switch
- Anti-corrosion coating on the oil separator
- T4 motor and transmitter (temperature class T4 outside the vacuum pump)

R5 RE 0040/0063 C


Oil-lubricated rotary vane vacuum pumps



VACUUM SOLUTIONS


Part of the **BUSCH** GROUP

Dimensional drawing

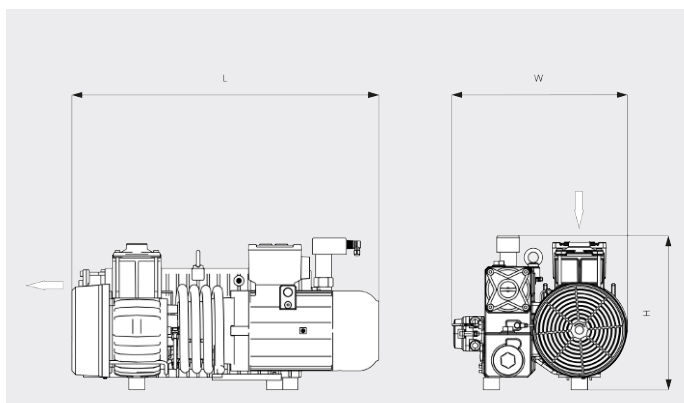

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

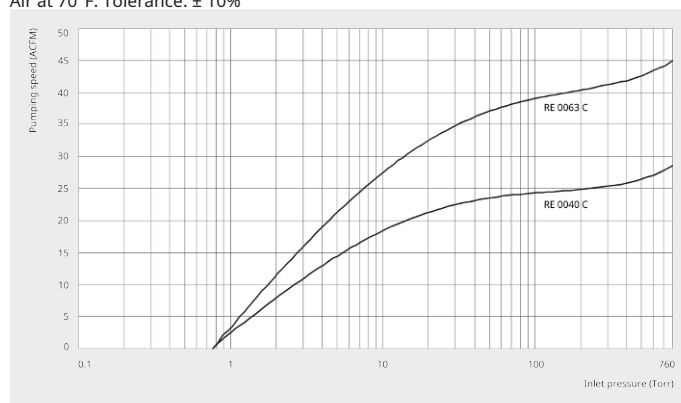

	R5 RE 0040 C	R5 RE 0063 C
Nominal pumping speed	28.2 ACFM	44.7 ACFM
Ultimate pressure	0.75 Torr	0.75 Torr
Nominal motor rating	3.0 hp	3.0 hp
Nominal motor speed	1800 rpm	1800 rpm
Sound pressure level (ISO 2151), KpA = 3 dB	66 dB(A)	68 dB(A)
Oil capacity	2.1 qts.	2.1 qts.
Weight approx.	191.4 Lbs.	200.2 Lbs.
Dimensions (L x W x H)	27.4 x 15.9 x 15 inches	28.4 x 15.9 x 15 inches
Gas inlet / outlet	G 1¼" / G 1¼"	G 1¼" / G 1¼"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW