


# MINK MB 0018 A

Dry claw vacuum pump



**VACUUM SOLUTIONS**

Part of the **BUSCH** GROUP

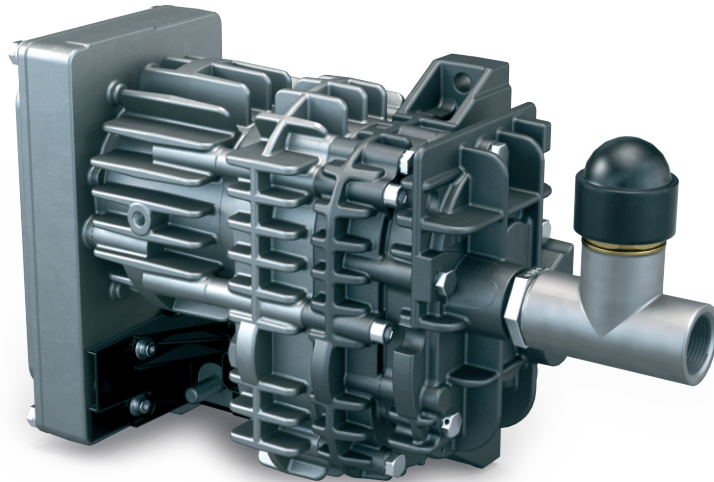

## Robust

Specially designed for mobile applications, may be operated under extreme conditions, in temperature ranges between -40 °C and +40 °C and at elevations between -1,000 m and 4,000 m, resistant to severe vibration

## Efficient

Latest claw vacuum technology, dry and contact-free compression, no contamination of pumped medium, intelligent variable speed drive, low energy consumption, long life cycle without servicing

## Compact

Small footprint due to "all-in-one" design

# MINK MB 0018 A


Dry claw vacuum pump



**VACUUM SOLUTIONS**


Part of the **BUSCH** GROUP

Dimensional drawing

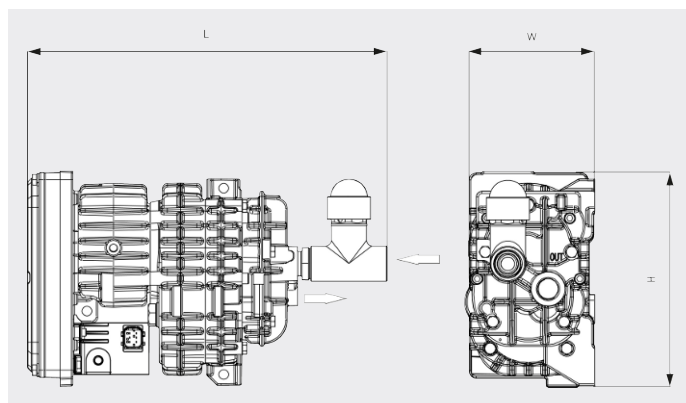

Pumping speed

Air at 20°C. Tolerance:  $\pm 10\%$

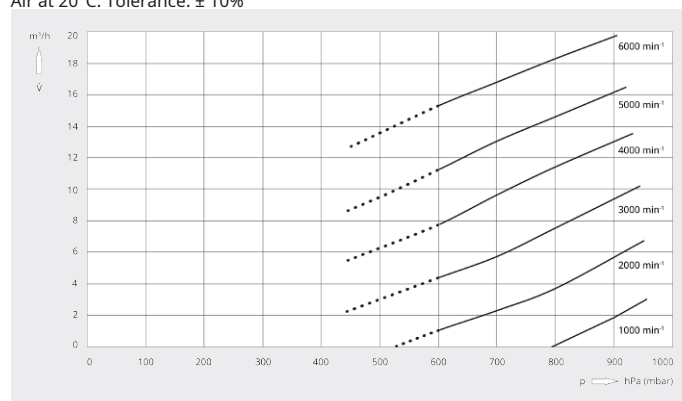

| MINK MB 0018 A                              |                       |
|---------------------------------------------|-----------------------|
| Nominal pumping speed                       | 10.6 ACFM             |
| Ultimate pressure                           | 450 TORR              |
| Nominal motor rating                        | 0.7 hp                |
| Nominal motor speed                         | 6000 RPM              |
| Ambient temperature                         | -104 ... +104 °F      |
| Sound pressure level (ISO 2151), KpA = 3 dB | 73 dB(A)              |
| Weight approx.                              | 14.3 Lbs.             |
| Dimensions (L x W x H)                      | 13 x 4.7 x 7.8 inches |
| Gas inlet / outlet                          | G ¾" / G ½"           |

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

[info@buschusa.com](mailto:info@buschusa.com) or +1 757 463 7800



CONTACT FORM



CALL NOW