

MINK MI 1502 BP

Dry claw compressors



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Flexible

Designed for numerous industrial applications of up to 2.0 bar(g), inlet filter and pressure relief valve as standard

Reliable

Air cooling, constantly high volume flow throughout the entire life cycle

Nearly maintenance-free

Dry and contact-free compression

MINK MI 1502 BP


Dry claw compressors



VACUUM SOLUTIONS


Part of the **BUSCH** GROUP

Dimensional drawing

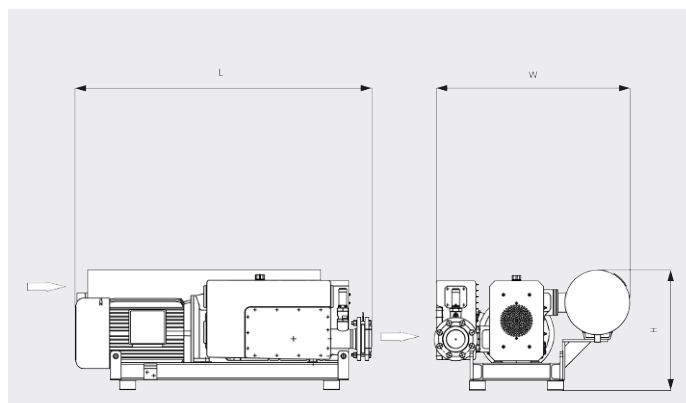

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

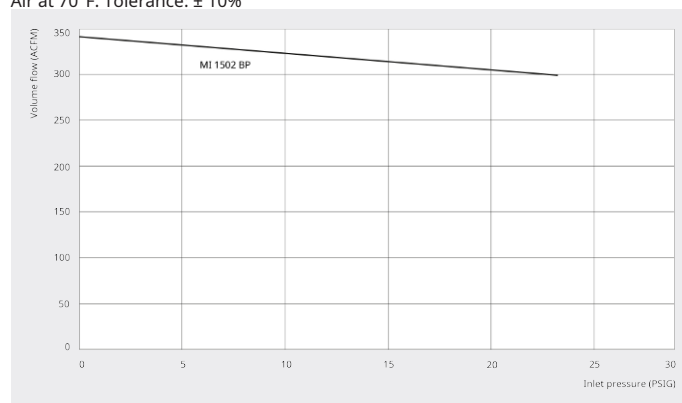

MINK MI 1502 BP	
Volume flow (at inlet)	341.4 ACFM
Overpressure	23.21 PSIG
Nominal motor rating	40 hp
Nominal motor speed	3600 RPM
Sound pressure level (ISO 3744), 1 m distance, at medium load	92 dB(A)
Weight approx.	860 Lbs.
Dimensions (L x W x H)	63.7 x 35.6 x 22.8 inches
Gas outlet	3" NPT

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW