

MINK MM 1202-1322 AP

Dry claw compressors



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Flexible

Designed for numerous industrial applications of up to 2.0 bar(g), inlet filter and pressure relief valve as standard

Reliable

Effective air cooling, constantly high volume flow throughout the entire life cycle

Nearly maintenance-free

Dry and contact-free compression

MINK MM 1202-1322 AP


Dry claw compressors



VACUUM SOLUTIONS


Part of the **BUSCH** GROUP

Dimensional drawing

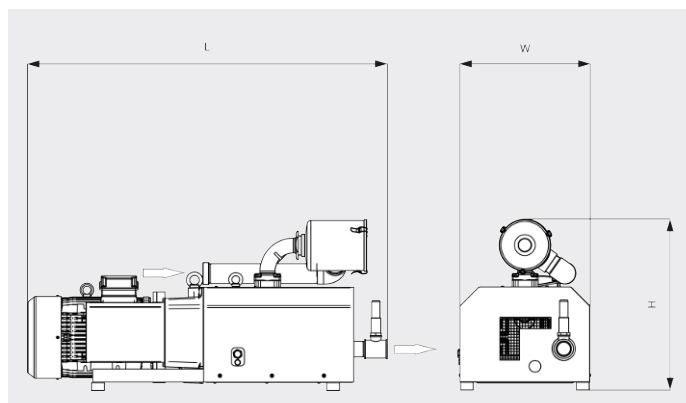

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

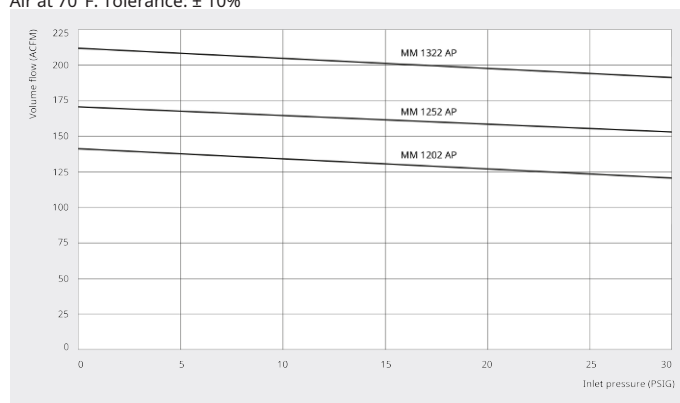

MINK MM 1202 AP	
Volume flow (at inlet)	141 ACFM
Overpressure	29 PSIG
Nominal motor rating	10.0 – 20.0 hp
Nominal motor speed	3600 RPM
Sound pressure level (ISO 3744), 1 m distance, at medium load	83 dB(A)
Weight approx.	560 ... 690 Lbs.
Dimensions (L x W x H)	49.3 x 20.3 x 26.1 inches
Gas outlet	2" NPT

MINK MM 1252 AP	
Volume flow (at inlet)	171 ACFM
Overpressure	29 PSIG
Nominal motor rating	15.0 – 25.0 hp
Nominal motor speed	3600 RPM

MINK MM 1202-1322 AP

Dry claw compressors



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

MINK MM 1252 AP	
Sound pressure level (ISO 3744), 1 m distance, at medium load	84 dB(A)
Weight approx.	600 ... 710 Lbs.
Dimensions (L x W x H)	53.4 x 20.3 x 26.1 inches
Gas outlet	2" NPT

MINK MM 1322 AP	
Volume flow (at inlet)	212 ACFM
Overpressure	29 PSIG
Nominal motor rating	20.0 – 30.0 hp
Nominal motor speed	3600 RPM
Sound pressure level (ISO 3744), 1 m distance, at medium load	85 dB(A)
Weight approx.	690 ... 800 Lbs.
Dimensions (L x W x H)	54 x 20.3 x 26.1 inches
Gas outlet	2" NPT

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW