

MINK MV 0312 B

Dry claw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations

Efficient

Latest claw vacuum technology, low energy consumption, minimized operating costs, nearly maintenance-free, effective air cooling

Compact

Small footprint

Accessories, spare parts and options

- Aqua version
- ATEX Category 3
- VSD version
- IoT kit

MINK MV 0312 B


Dry claw vacuum pump



VACUUM SOLUTIONS


Part of the **BUSCH** GROUP

Dimensional drawing

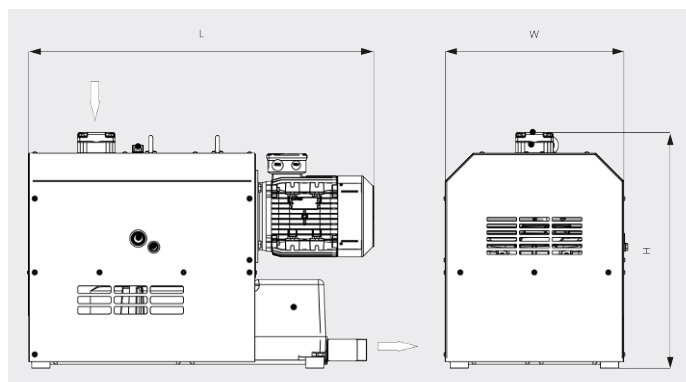

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

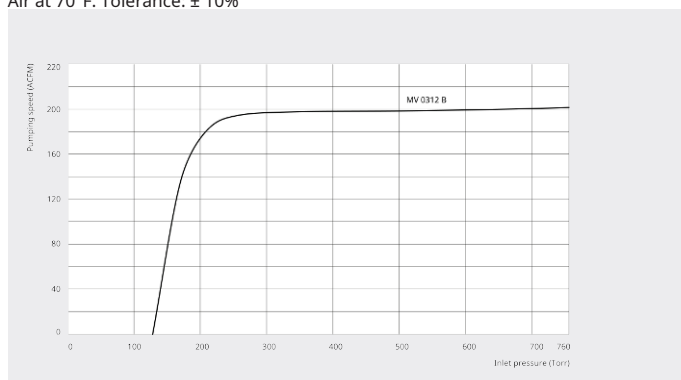

MINK MV 0312 B	
Nominal pumping speed	203 ACFM
Ultimate pressure	112.5 TORR
Nominal motor rating	9.0 hp
Nominal motor speed	3600 RPM
Sound pressure level (ISO 3744), 1 m distance, at medium load	72 dB(A)
Weight approx.	660 Lbs.
Dimensions (L x W x H)	37 x 19,5 x 25,6 inches
Gas inlet / outlet	2" / 1 1/4" NPT

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW