

MINK MV 0502/0602 B

Dry claw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations

Efficient

Latest claw vacuum technology, low energy consumption, minimized operating costs, nearly maintenance-free, effective air cooling

Compact

Small footprint

MINK MV 0502/0602 B


Dry claw vacuum pumps



VACUUM SOLUTIONS


Part of the **BUSCH GROUP**

Dimensional drawing

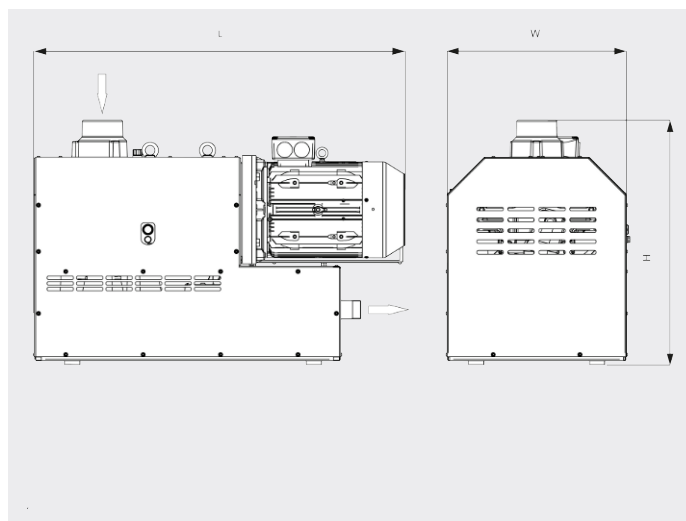

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

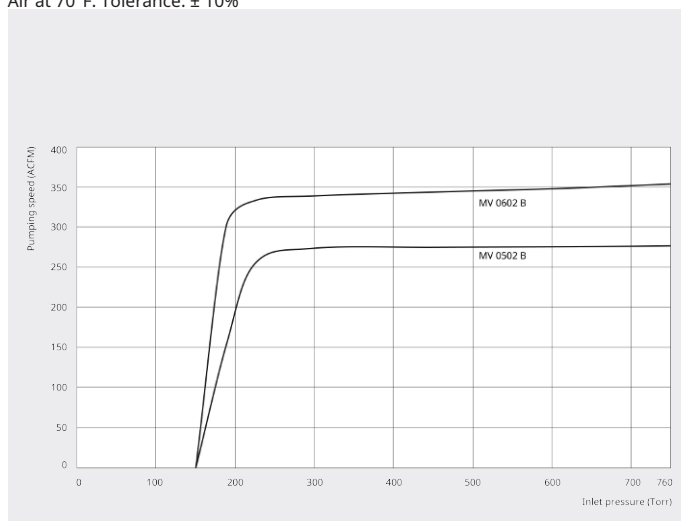

	MINK MV 0502 B	MINK MV 0602 B
Nominal pumping speed	277 ACFM	353 ACFM
Ultimate pressure	150 TORR	150 TORR
Nominal motor rating	12.7 hp	16.9 hp
Nominal motor speed	3600 RPM	3600 RPM
Sound pressure level (ISO 3744), 1 m distance, at medium load	75 dB(A)	76 dB(A)
Weight approx.	1036 Lbs.	1040 Lbs.
Dimensions (L x W x H)	42.8 x 22.8 x 31.3 inches	43.3 x 22.8 x 31.3 inches
Gas inlet / outlet	3" / 2" NPT	3" / 2" NPT

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW