

COBRA NC 0600 C

Dry screw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



High performance

Advanced screw design, patented self-balancing screws

ATEX-certified

Keeps gas temperatures below 200°C, certified for temperature class T3, ideally suited for processes with temperature-sensitive process gases

Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient water cooling

COBRA NC 0600 C


Dry screw vacuum pump



VACUUM SOLUTIONS


Part of the **BUSCH** GROUP

Dimensional drawing

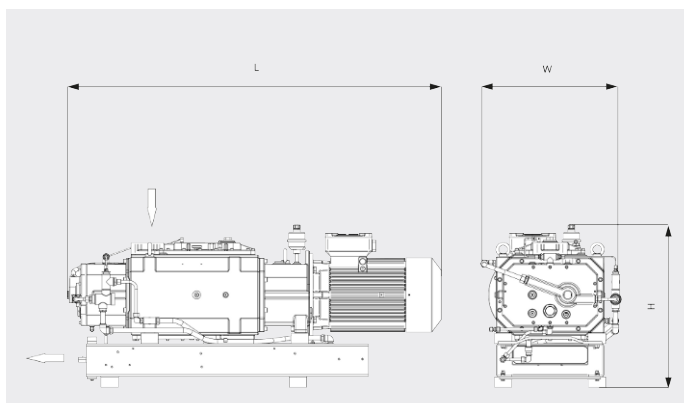

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

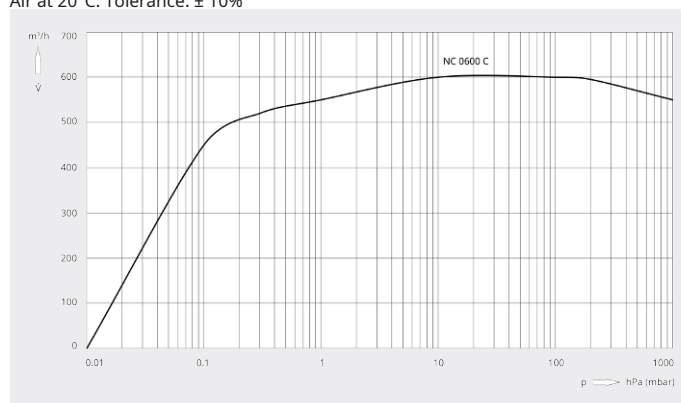

COBRA NC 0600 C	
Pumping speed	353.1 ACFM
Ultimate pressure	≤ 0.0075 Torr
Nominal motor rating	20 hp
Power consumption at ultimate pressure	12.1 hp
Nominal motor speed	3600 rpm
Sound pressure level (ISO 2151), KpA = 3 dB	≤ 76 dB(A)
Weight approx.	1320 Lbs.
Dimensions (L x W x H)	25.4 x 23.7 x 25.2 inches
Gas inlet / outlet	DN 100 ISO-K / DN 100 ISO-K

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW