


COBRA NC 0630-2000 B/C VR

Dry screw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

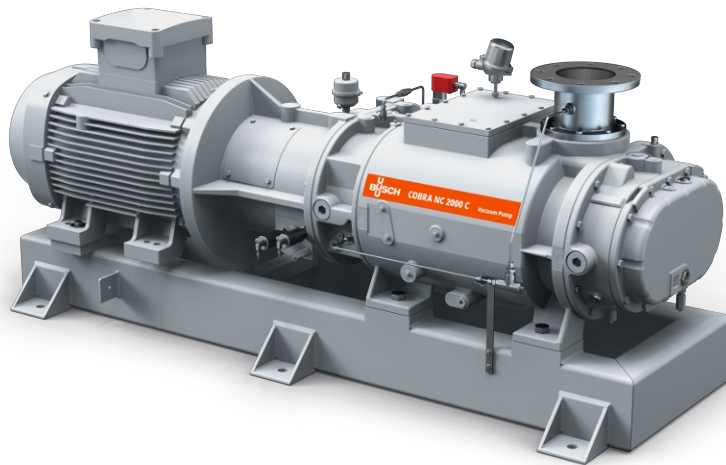

High performance

Advanced screw design, patented self-balancing screws

Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime

ATEX-certified

Low gas temperatures within the compression chamber, special cooling system for the extraction of petrol vapor, perfectly suited for the stage I recovery of petrol and other hydrocarbon vapors in the petrochemical industry

COBRA NC 0630-2000 B/C VR


Dry screw vacuum pumps



VACUUM SOLUTIONS


Part of the **BUSCH GROUP**

Dimensional drawing

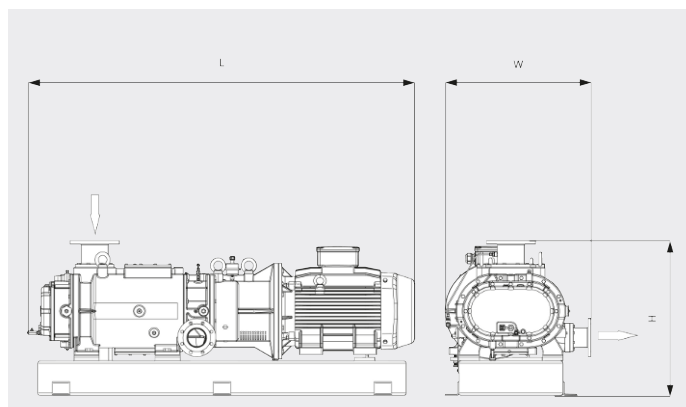

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

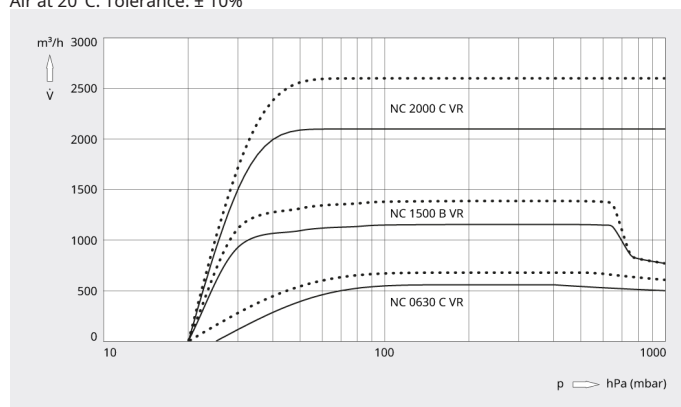

	COBRA NC 0630 C VR	COBRA NC 1500 B VR	COBRA NC 2000 C VR
Pumping speed	400 ACFM	824 ACFM	1530 ACFM
Ultimate pressure	< 15 Torr	< 15 Torr	< 15 Torr
Nominal motor rating	25 hp	50 hp	100 hp
Nominal motor speed	3600 rpm	3600 rpm	3600 rpm
Sound pressure level (ISO 2151), KpA = 3 dB	78 dB(A)	81 dB(A)	84 dB(A)
Weight approx.	1940 Lbs.	2755 Lbs.	4409 Lbs.
Dimensions (L x W x H)	66.3 x 28.3 x 33.9 inches	77.2 x 29.1 x 33.7 inches	87.6 x 34.6 35.4 inches
Gas inlet / outlet	ANSI 4" B16.5 / ANSI 3" B16.5	ANSI 4" B16.5 / ANSI 3" B16.5	ANSI 6" B16.5 / ANSI 4" B16.5

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW