


PUMA WY 3600 A

Vacuum booster



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

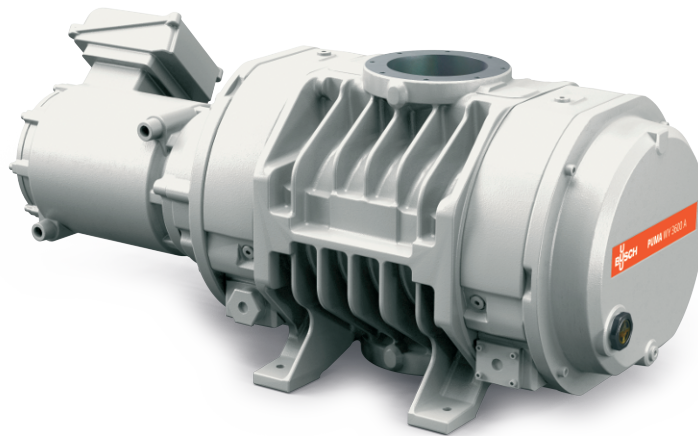

Reliable

Special lobe design to prevent powder and particle deposits, robust construction made of GGG40 material, leak-tight

High performance

Specially designed for harsh applications in the medium and high vacuum range, including semiconductor processes with powder and dust, excellent volumetric efficiency

Flexible

Reliable performance under varying operating conditions, boosts the performance of all types of backing pumps

PUMA WY 3600 A


Vacuum booster




VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

Dimensional drawing

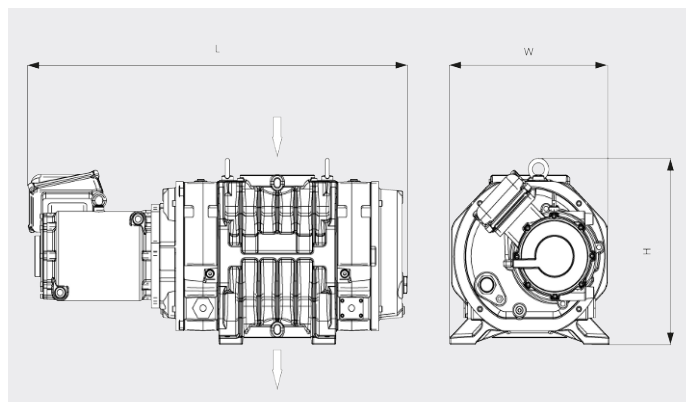

Pumping speed
Air at 70°F. Tolerance: $\pm 10\%$

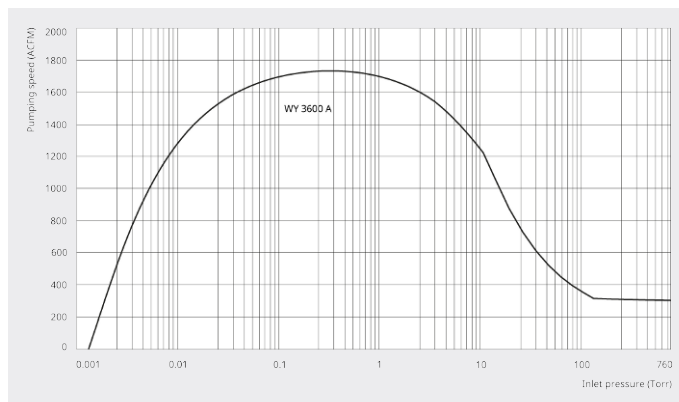

PUMA WY 3600 A	
Nominal pumping speed	2118 ACFM
Pumping speed	1789 ACFM
Max. differential pressure	22.5 TORR
Nominal motor rating	20.1 hp
Nominal motor speed	5400 RPM
Weight approx.	1100 Lbs.
Leakage rate	$< 0.75 \cdot 10^{-7}$ mbar · l/s
Dimensions (L x W x H)	44.8 x 21.4 x 18.9 inches
Gas inlet / outlet	DN 160 ISO / DN 160 ISO

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW