

GABA AWE 050 AE

Gas abatement system



VACUUM SOLUTIONS



Reliable

Specially designed for demanding EPI processes, powerful venturi unit, patented gas inlet clogging preventer, no trapping of by-products before abatement necessary (honey trap)

Minimal maintenance

Extended service intervals, high uptime, easy servicing, fast service routine, no dismantling necessary

Efficient

Proven wet scrubber technology, low operating costs, built-in water recirculation system, easy operation through PLC with color touch screen


GABA AWE 050 AE

Gas abatement system



VACUUM SOLUTIONS

Dimensional drawing

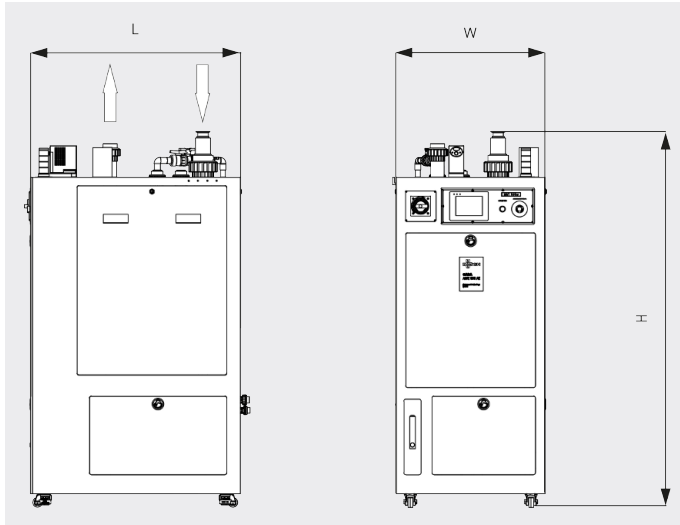

| GABA AWE 050 AE | |
|--|------------------------------|
| Capacity | 500 slm |
| Power consumption (avg.) | 2.68 HP |
| Nitrogen consumption (avg) | 100 slm |
| Water consumption (avg.) | 5 slm |
| Min. gas exhaust | 0.5 m ³ /min |
| Cabinet exhaust | 1 m ³ /min |
| Weight approx. (dry) | 507 Lbs. |
| Weight approx. (wet) | 661 Lbs. |
| Dimensions (L x W x H) | 43.31 x 30.71 x 68.11 inches |
| Dimensions (L x W x H) with 3-way valve option | 43.31 x 30.71 x 85.43 inches |

GABA AWE 050 AE

Gas abatement system



VACUUM SOLUTIONS

| GABA AWE 050 AE | |
|---|--|
| Min. clearance | 43.31 inches (front), 19.68 inches (side), 19.68 inches (rear), 19.68 inches (top) |
| Gas inlet | NW 50 flange (1 port) |
| Gas outlet | 50A(2") PVC Union |
| DRE (Destruction Removal Efficiency) | > 99.99 % |
| Gas | Hydrogen Chloride (HCl) |
| Gas flow rate (HCl) | 30 slm |
| Carrier gas flow rate (N ₂) | 100 slm |
| Outlet gas concentration | < 0.13 ppm |

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW