

# MINK MV 0500/0600 B

Dry claw vacuum pumps



VACUUM SOLUTIONS



## Flexible

Variable speed drive (VSD)

## Efficient

Latest claw technology, additional pumping speed thanks to pressure control, up to 20% more performance, low energy consumption, minimized operating costs, nearly maintenance-free

## Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations


# MINK MV 0500/0600 B

Dry claw vacuum pumps



VACUUM SOLUTIONS


Dimensional drawing

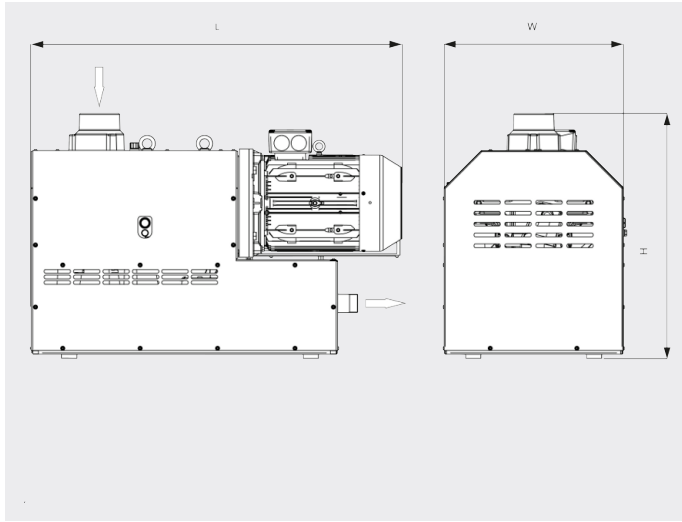

Pumping speed

Air at 20°C. Tolerance: ± 10%

— 20 Hz ..... 60 Hz

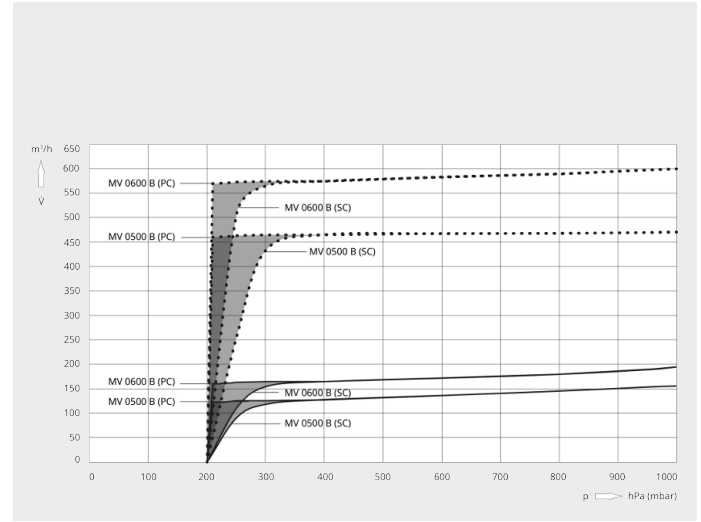

	MINK MV 0500 B	MINK MV 0600 B
Nominal pumping speed	276.6 ACFM	353.1 ACFM
Ultimate pressure	150 TORR	150 TORR
Nominal motor rating	14.8–16.9 HP	20.1–23.2 HP
Nominal motor speed	1200–3600 RPM	1200–3600 RPM
Noise level (ISO 2151)	75 dB(A)	76 dB(A)
Weight approx.	1089 Lbs.	1210 Lbs.
Dimensions (L x W x H)	47 x 22.8 x 31.3 inches	47.2 x 22.8 x 31.3 inches
Gas inlet / outlet	G 3" / R 2"	G 3" / R 2"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[info@buschusa.com](mailto:info@buschusa.com) or +1 757 463 7800



CONTACT FORM



CALL NOW