

MINK MI 1502 BP

Dry claw compressor



VACUUM SOLUTIONS



Flexible

Designed for numerous industrial applications of up to 2.0 bar(g), inlet filter and pressure relief valve as standard

Reliable

Air cooling, constantly high volume flow throughout the entire life cycle

Nearly maintenance-free


Dry and contact-free compression

MINK MI 1502 BP

Dry claw compressor




Dimensional drawing

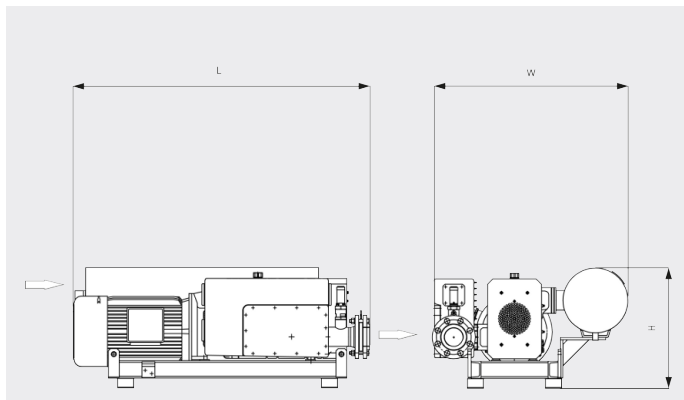

Volume flow

Air at 70°F. Tolerance: $\pm 10\%$

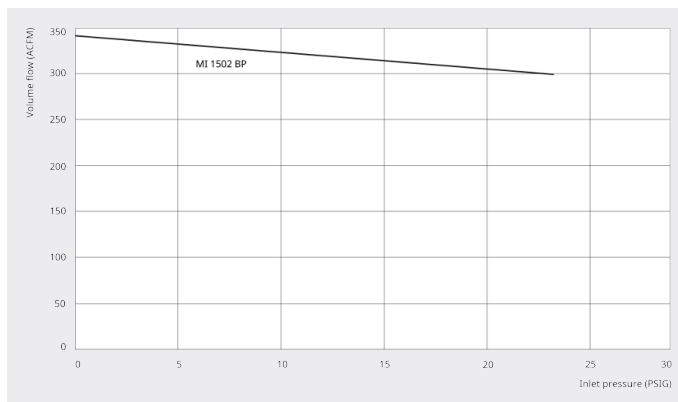

MINK MI 1502 BP	
Volume flow	341.4 ACFM
Overpressure (at inlet)	7.3 PSIG
Nominal motor rating	40 HP
Nominal motor speed	3600 RPM
Noise level (ISO 2151)	92 dB(A)
Weight approx.	1350 Lbs.
Dimensions (L x W x H)	63.7 x 35.6 x 22.8 inches
Gas outlet	3" NPT

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW