

COMBI CMM (MINK + MINK)

Vacuum pump unit



VACUUM SOLUTIONS



Efficient

Latest dry claw vacuum technology, substantial energy savings compared to conventional vacuum generators, cost-effective

Nearly maintenance-free

Dry and contact-free operation, solution based on MINK MM dry claw vacuum pumps

Flexible


Easy adaption to individual customer requirements and processes

COMBI CMM (MINK + MINK)

Vacuum pump unit




Dimensional drawing

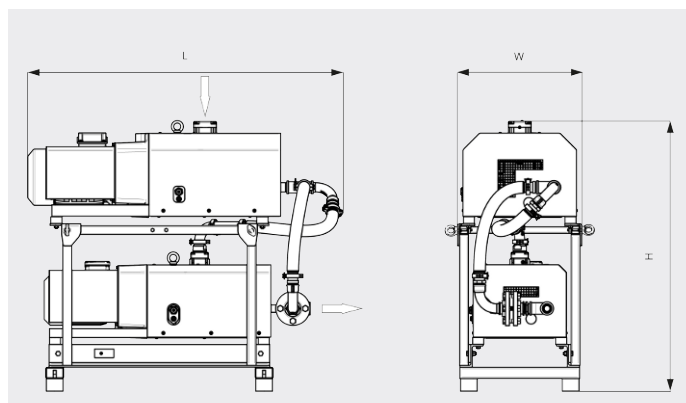

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

— 50 Hz 60 Hz

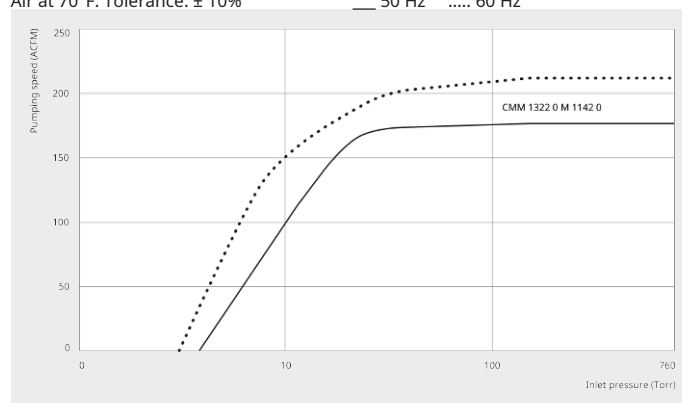

COMBI CMM	
Nominal pumping speed	176.6 / 211.9 ACFM (50 / 60 Hz)
Ultimate pressure	7.5 TORR
Nominal motor rating	12.8 / 17.2 HP (50 / 60 Hz)
Nominal motor speed	3000 / 3600 RPM (50 / 60 Hz)
Weight approx.	1323 Lbs.
Dimensions (L x W x H)	54.5 x 21.5 x 46.6 inches
Gas inlet / outlet	G 2" / G 1 1/4"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW