

# R5 RA 0600 A ECOTORQUE

Oil-lubricated rotary vane vacuum pump



VACUUM SOLUTIONS



## Efficient

Up to 50% energy savings thanks to the variable speed drive (ECOTORQUE), Ecomode with automatic start and stop function

## High performance

High pumping speed at low pressure ranges, designed for continuous operation in the rough vacuum range, best-in-class footprint performance ratio

## Flexible


Precise adjustment of vacuum level (pressure control) and pumping speed (speed control) to process requirements, compatible with a wide range of supply voltages, easy control and monitoring of up to eight vacuum pumps with optional ECOTORQUE Master Control

# R5 RA 0600 A ECOTORQUE

Oil-lubricated rotary vane vacuum pump




Dimensional drawing

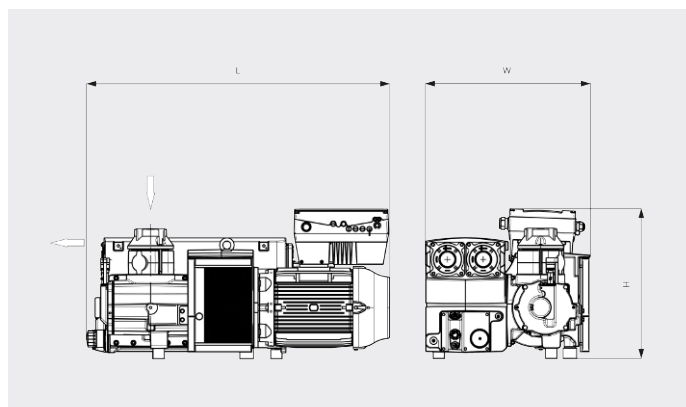

Pumping speed

Air at 70°F. Tolerance:  $\pm 10\%$

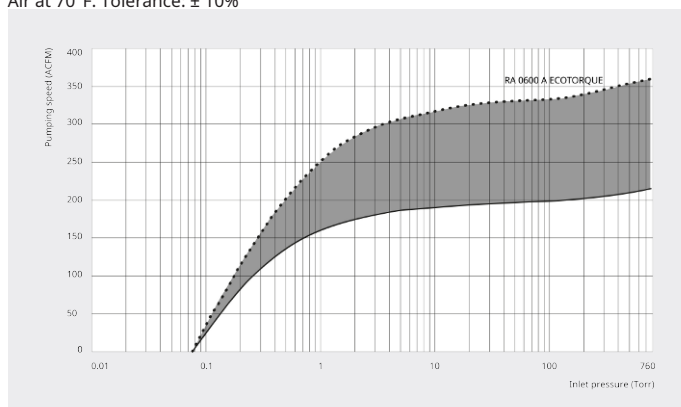

R5 RA 0600 A ECOTORQUE	
Nominal pumping speed	194.0 – 353.0 ACFM
Ultimate pressure (Gas-ballast valve closed)	0.075 TORR
Ultimate pressure (Gas-ballast valve open)	0.375 TORR
Nominal motor rating	25.0 HP
Power consumption at ultimate pressure	3.5 – 7.0 HP
Sound pressure level (ISO 2151), KpA = 3 dB	70 - 77 dB(A)
Oil capacity	11.6 qts.
Weight approx.	1160 Lbs.
Dimensions (L x W x H)	52.0 x 28.3 x 25.7 inches
Gas outlet	G 3"

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

[info@buschusa.com](mailto:info@buschusa.com) or +1 757 463 7800



CONTACT FORM



CALL NOW