

COBRA NX 0950 A PLUS

Dry screw vacuum pump



VACUUM SOLUTIONS



Control and monitoring

Ready for Industry 4.0 providing remote control, condition monitoring and communication protocols

Cost savings

Reduced energy consumption and minimized operating costs, variable speed drive

Proven technology

Reliable operation thanks to proven dry screw vacuum technology, advanced screw design, minimal maintenance


COBRA NX 0950 A PLUS

Dry screw vacuum pump



VACUUM SOLUTIONS


Dimensional drawing

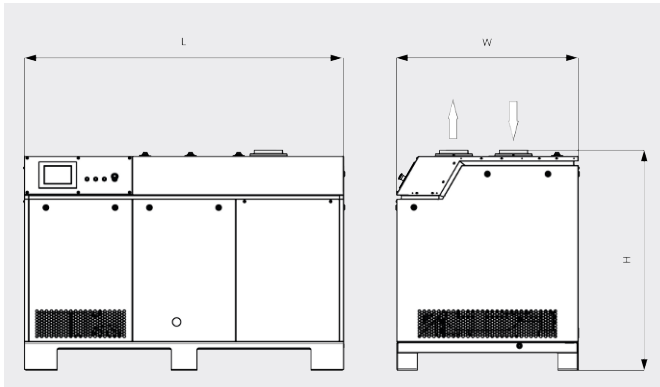

Pumping speed

Air at 20°C. Tolerance: ± 10%

■ Operating range

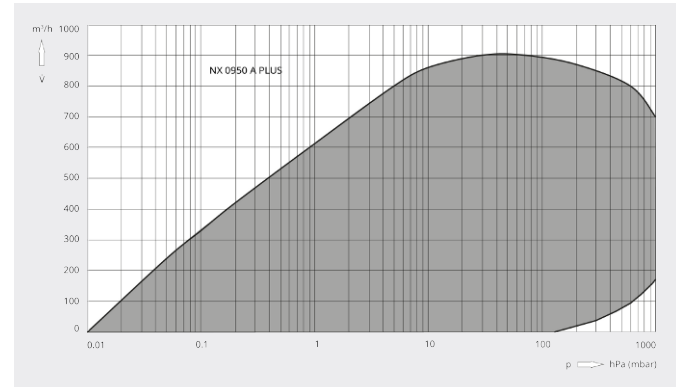

COBRA NX 0950 A PLUS	
Nominal pumping speed	max. 900 m ³ /h
Ultimate pressure	0.01 hPa (mbar)
Nominal motor rating	18,5 kW
Nominal motor speed	4320 min ⁻¹
Noise level (ISO 2151)	63 dB(A)
Approximate weight	1200 kg
Dimensions (L x W x H)	1855 x 1050 x 1272 mm
Gas inlet / outlet	DN 100 ISO + G3" / DN 100 ISO + G3"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
sales@busch.co.za or +27 (0)11 856 0650



CONTACT FORM



CALL NOW