SECO SV 1008 C

Dry-running rotary vane vacuum pump

Discover all advantages of
the product series SECO SV

Compact

Direct-drive construction

Reliable

Robust construction, proven performance, self-lubricating vanes, no operating fluids

High performance

High uptime, high performance vanes

Accessories

- Inlet filter
- Vacuum regulating unit
- Non-return valve (inlet)
- Hose nipple

© Busch Vacuum Solutions

SECO SV 1008 C

Dry-running rotary vane vacuum pump

VACUUM SOLUTIONS

Dimensional drawing

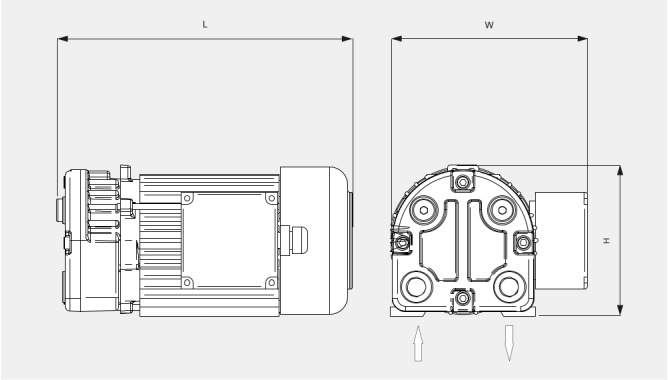

Pumping speed

Air at 20 °C. Tolerance: ± 10%

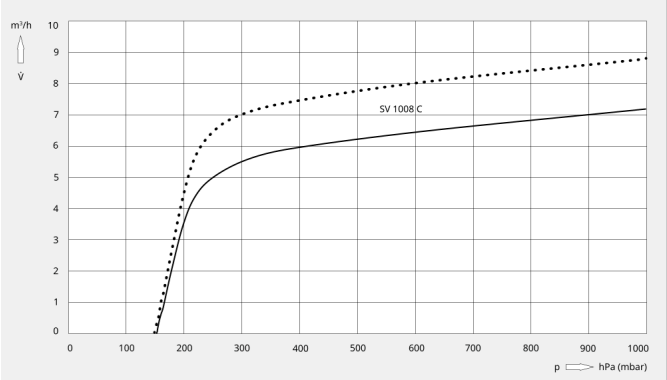

The following technical values refer to ISO 50 Hz

	SECO SV 1008 C
Nominal pumping speed	7.3 m³/h
Ultimate pressure	150 hPa (mbar)
Nominal motor rating	0.25 kW
Nominal motor speed	3000 min^{-1}
Noise level (ISO 2151)	63 dB(A)
Weight approx.	8.5 kg
Dimensions (L x W x H)	245 x 164 x 125 mm
Gas inlet	G #"
Gas outlet	G #"

The following technical values refer to ISO 60 Hz

	SECO SV 1008 C
Nominal pumping speed	8.8 m³/h
Ultimate pressure	150 hPa (mbar)
Nominal motor rating	0.30 kW
Nominal motor speed	3600 min^{-1}
Noise level (ISO 2151)	66 dB(A)

© Busch Vacuum Solutions

SECO SV 1008 C

Dry-running rotary vane vacuum pump

VACUUM SOLUTIONS

	SECO SV 1008 C
Weight approx.	8.5 kg
Dimensions (L x W x H)	245 x 164 x 125 mm
Gas inlet	G #"
Gas outlet	G #"

DO YOU WANT TO KNOW MORE

Please contact us!
info@busch.co.za or +27 (0)11 856 0650

CONTACT FORM

CALL US NOW

© Busch Vacuum Solutions