

# MINK MM 1104-1142 BV

干式爪式真空泵



VACUUM SOLUTIONS



## 高效

与传统真空获得设备相比，更加节能，最大限度地降低了运行成本

## 几乎免维护

干式和非接触式运行

## 坚固耐用

成熟的设计，超过 200,000 台真空泵正在运行


# MINK MM 1104-1142 BV

干式爪式真空泵



VACUUM SOLUTIONS


尺寸图

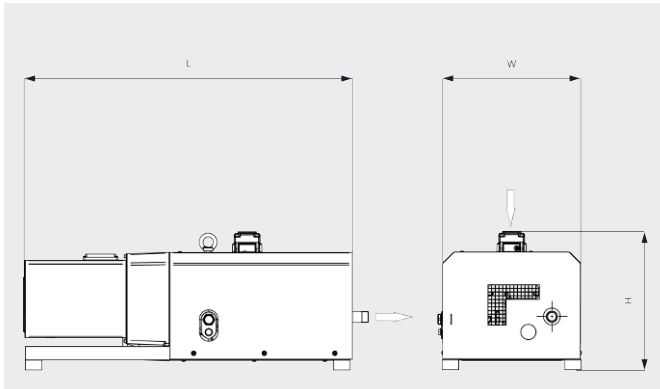

抽气速率

空气温度为 20°C 时。公差: ± 10%

— 50 Hz ..... 60 Hz

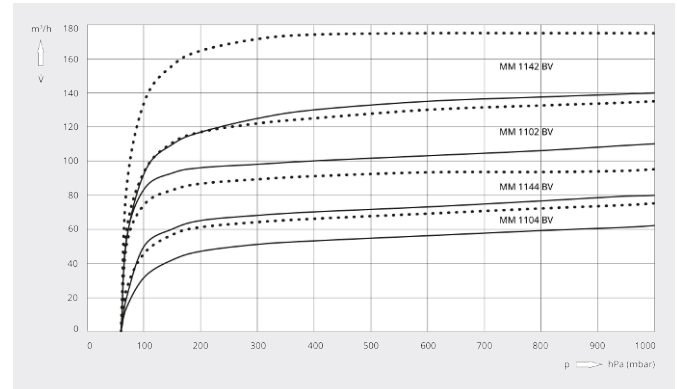

	MINK MM 1104 BV	MINK MM 1144 BV	MINK MM 1102 BV	MINK MM 1142 BV
额定抽速	62 / 75 m <sup>3</sup> /h (50 / 60 Hz)	80 / 95 m <sup>3</sup> /h (50 / 60 Hz)	110 / 135 m <sup>3</sup> /h (50 / 60 Hz)	140 / 175 m <sup>3</sup> /h (50 / 60 Hz)
极限压力	60 hPa (mbar) (50 / 60 Hz)	60 hPa (mbar) (50 / 60 Hz)	60 hPa (mbar) (50 / 60 Hz)	60 hPa (mbar) (50 / 60 Hz)
电机额定功率	1.3 kW (50 Hz) 1.5 / 1.7 kW (50 / 60 Hz)	1.8 kW (50 Hz) 2.2 / 2.4 kW (50 / 60 Hz)	2.8 kW (50 Hz) 3.0 / 3.4 kW (50 / 60 Hz)	3.5 / 4.8 kW (50 / 60 Hz)
电机额定转速	1500 / 1800 min <sup>-1</sup> (50 / 60 Hz)	1500 / 1800 min <sup>-1</sup> (50 / 60 Hz)	3000 / 3600 min <sup>-1</sup> (50 / 60 Hz)	3000 / 3600 min <sup>-1</sup> (50 / 60 Hz)
噪声级 (ISO 2151)	66 / 70 dB(A) (50 / 60 Hz)	66 / 70 dB(A) (50 / 60 Hz)	75 / 79 dB(A) (50 / 60 Hz)	75 / 79 dB(A) (50 / 60 Hz)
重量 (约)	180 kg (50 / 60 Hz)	185 kg (50 / 60 Hz)	180 kg (50 / 60 Hz)	185 / 195 kg (50 / 60 Hz)
尺寸 (L x W x H)	970 x 430 x 410 mm (50 / 60 Hz)	970 x 430 x 410 mm (50 / 60 Hz)	1010 x 430 x 410 mm (50 / 60 Hz)	1030 x 430 x 410 / 1050 x 430 x 410 mm (50 / 60 Hz)
进气口 / 排气口	G 1¼" / G 1"	G 1¼" / G 1"	G 1¼" / R 1"	G 1¼" / R 1"

您想了解更多吗?

直接联系我们!

info@busch-china.com 或 +86 (0)21 67 60 08 00



填写联系表单



马上拨打电话