

# MINK MM 1202/1252 AV

Dry claw vacuum pumps



VACUUM SOLUTIONS



## Efficient

Substantial energy savings compared to conventional vacuum generators, minimized operating costs

## Nearly maintenance-free

Dry and contact-free operation

## Robust

Proven design, more than 200.000 vacuum pumps in operation


# MINK MM 1202/1252 AV

Dry claw vacuum pumps



VACUUM SOLUTIONS


Dimensional drawing

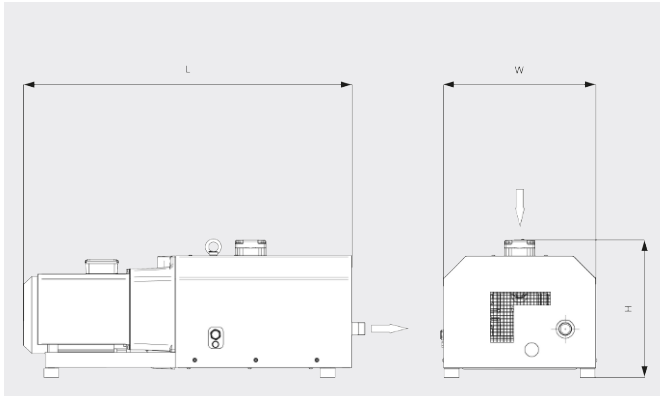

Pumping speed

Air at 20°C. Tolerance: ± 10%

— 50 Hz ..... 60 Hz

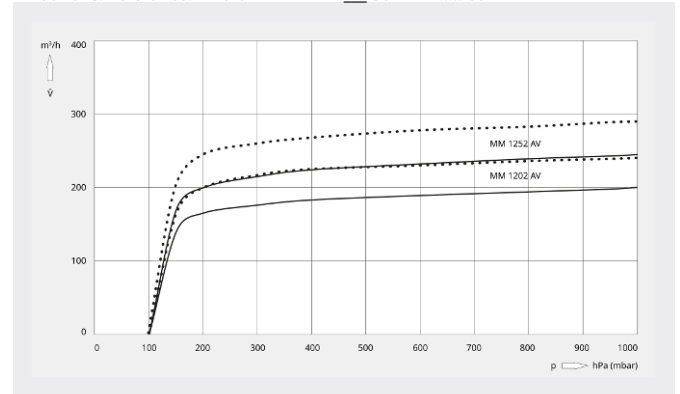

	MINK MM 1202 AV	MINK MM 1252 AV
<b>Nominal pumping speed</b>	200 / 240 m³/h (50 / 60 Hz)	245 / 290 m³/h (50 / 60 Hz)
<b>Ultimate pressure</b>	100 hPa (mbar) (50 / 60 Hz)	100 hPa (mbar) (50 / 60 Hz)
<b>Ultimate pressure (continuous operation)</b>	200 hPa (mbar) (50 / 60 Hz)	200 hPa (mbar) (50 / 60 Hz)
<b>Nominal motor rating</b>	4.3 / 5.2 kW (50 / 60 Hz)	5.1 / 6.8 kW (50 / 60 Hz)
<b>Nominal motor speed</b>	3000 / 3600 min <sup>-1</sup> (50 / 60 Hz)	3000 / 3600 min <sup>-1</sup> (50 / 60 Hz)
<b>Noise level (ISO 2151)</b>	75 / 79 dB(A) (50 / 60 Hz)	75 / 79 dB(A) (50 / 60 Hz)
<b>Weight approx.</b>	240 / 245 kg (50 / 60 Hz)	240 / 290 kg (50 / 60 Hz)
<b>Dimensions (L x W x H)</b>	1010 x 515 x 450 / 1090 x 515 x 450 mm (50 / 60 Hz)	1050 x 515 x 450 / 1065 x 515 x 450 mm (50 / 60 Hz)
<b>Gas inlet / outlet</b>	G 2" / R 1"	G 2" / R 1"

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[sales@busch.com.au](mailto:sales@busch.com.au) or 1 800 639 087



CONTACT FORM



CALL NOW