


# MINK MI 2124/2122 BV

Dry claw vacuum pumps



VACUUM SOLUTIONS

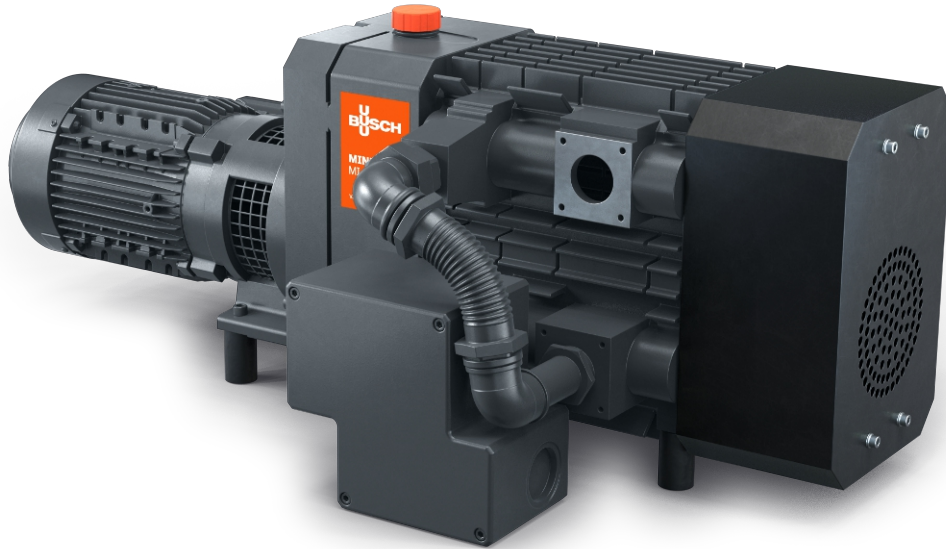

## Efficient

Substantial energy savings compared to conventional vacuum generators, minimized operating costs

## Nearly maintenance-free

Dry and contact-free operation

## High performance


Low ultimate pressure due to two-stage construction

# MINK MI 2124/2122 BV

Dry claw vacuum pumps




Dimensional drawing

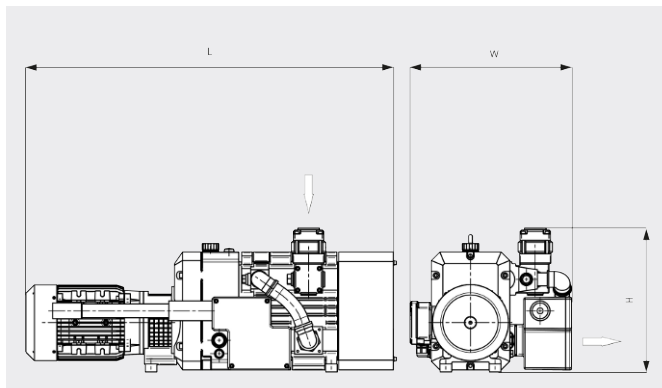

Pumping speed

Air at 20°C. Tolerance:  $\pm 10\%$

— 50 Hz ..... 60 Hz

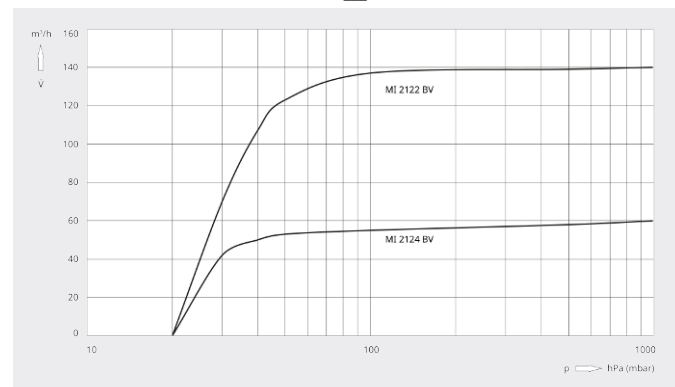

|                        | MINK MI 2124 BV                          | MINK MI 2122 BV                          |
|------------------------|------------------------------------------|------------------------------------------|
| Nominal pumping speed  | 50 / 60 m³/h (50 / 60 Hz)                | 120 / 140 m³/h (50 / 60 Hz)              |
| Ultimate pressure      | 20 hPa (mbar) (50 / 60 Hz)               | 20 hPa (mbar) (50 / 60 Hz)               |
| Nominal motor rating   | 1.5 kW (50 Hz) 2.0 / 2.4 kW (50 / 60 Hz) | 4.2 kW (50 Hz) 5.1 / 6.8 kW (50 / 60 Hz) |
| Nominal motor speed    | 1500 / 1800 min⁻¹ (50 / 60 Hz)           | 3000 / 3600 min⁻¹ (50 / 60 Hz)           |
| Noise level (ISO 2151) | 75 / 77 dB(A) (50 / 60 Hz)               | 81 / 84 dB(A) (50 / 60 Hz)               |
| Weight approx.         | 135 kg                                   | 145 kg                                   |
| Dimensions (L x W x H) | 940 x 415 x 370 mm                       | 970 x 430 x 370 mm                       |
| Gas inlet / outlet     | G 1¼" / G 1"                             | G 1¼" / G 1"                             |

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[sales@busch.com.bd](mailto:sales@busch.com.bd) or +880 178 766 0359



CONTACT FORM



CALL NOW