

COBRA DS 0080/0160 G

Dry screw vacuum pumps



VACUUM SOLUTIONS



High performance

Advanced screw design, excellent running qualities, perfectly suited for chemical vapor deposition, rapid thermal processing or atomic layer deposition

Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient indirect water cooling, high hydrogen throughput

Compact

Fit-in-place design, directly mounted canned motor


COBRA DS 0080/0160 G

Dry screw vacuum pumps



VACUUM SOLUTIONS


Dimensional drawing

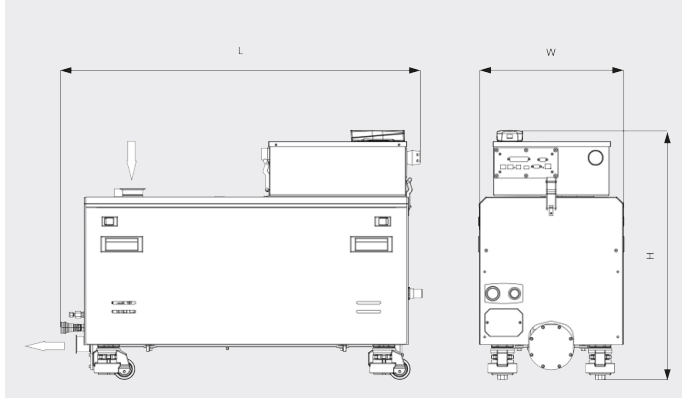

Pumping speed

Air at 20°C. Tolerance: ± 10%

— 50 Hz 60 Hz

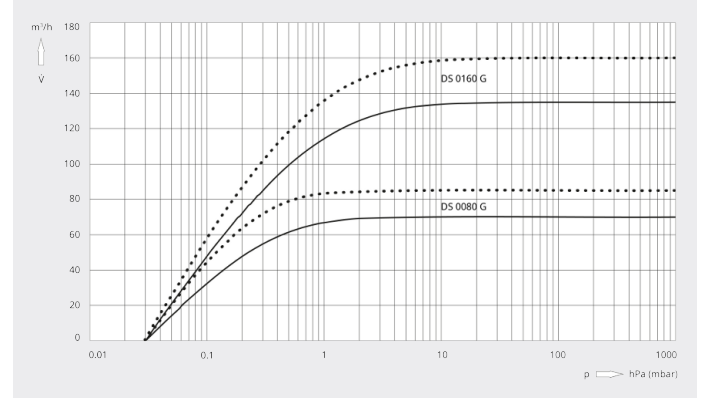

	COBRA DS 0080 G	COBRA DS 0160 G
Nominal pumping speed	70 / 85 m³/h (50 / 60 Hz)	140 / 160 m³/h (50 / 60 Hz)
Ultimate pressure	0.03 hPa (mbar) (50 / 60 Hz)	0.03 hPa (mbar) (50 / 60 Hz)
Nominal motor rating	4.0 / 4.4 kW (50 / 60 Hz)	5.5 / 6.6 kW (50 / 60 Hz)
Power consumption at ultimate pressure	2.6 / 3.2 kW (50 / 60 Hz)	4.3 / 5.2 kW (50 / 60 Hz)
Nominal motor speed	3000 / 3600 min ⁻¹ (50 / 60 Hz)	3000 / 3600 min ⁻¹ (50 / 60 Hz)
Noise level (ISO 2151)	< 62 dB(A) (50 / 60 Hz)	< 68 dB(A) (50 / 60 Hz)
Water consumption	4.0 l/min (50 / 60 Hz)	4.0 l/min (50 / 60 Hz)
Nitrogen consumption	0 – 75 l/min (50 / 60 Hz)	0 – 75 l/min (50 / 60 Hz)
Weight approx.	276 kg	338 kg
Dimensions (L x W x H)	865 x 385 x 667 mm	975 x 425 x 697 mm
Gas inlet / outlet	DN 40 / DN 40	DN 50 / DN 40

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.ca or +1 800 363 6360



CONTACT FORM



CALL NOW