

# MINK MM 1402/1502 AV

Dry claw vacuum pumps



VACUUM SOLUTIONS



## Efficient

Substantial energy savings compared to conventional vacuum generators, minimized operating costs

## Nearly maintenance-free

Dry and contact-free operation

## Robust


Proven design, more than 200.000 vacuum pumps in operation

# MINK MM 1402/1502 AV

Dry claw vacuum pumps




Dimensional drawing

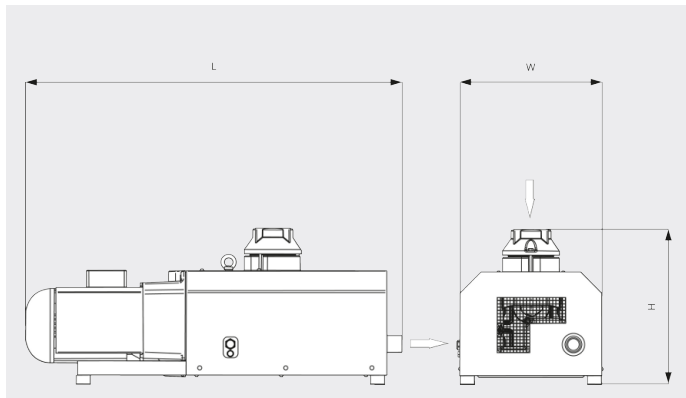

Pumping speed

Air at 20°C. Tolerance: ± 10%

— 50 Hz    ..... 60 Hz

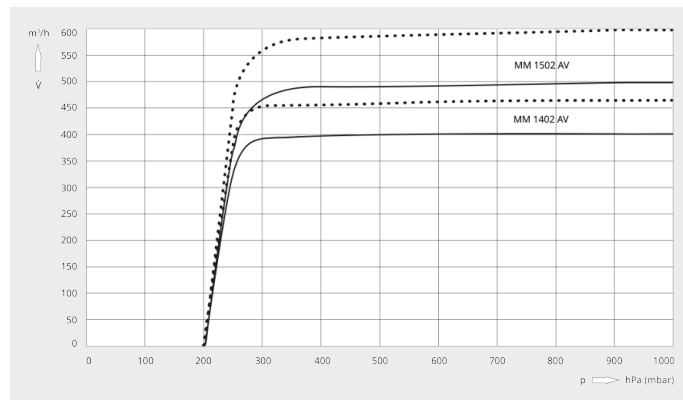

	MINK MM 1402 AV	MINK MM 1502 AV
<b>Nominal pumping speed</b>	400 / 470 m³/h (50 / 60 Hz)	500 / 600 m³/h (50 / 60 Hz)
<b>Ultimate pressure</b>	200 hPa (mbar) (50 / 60 Hz)	200 hPa (mbar) (50 / 60 Hz)
<b>Nominal motor rating</b>	7.5 / 9.5 kW (50 / 60 Hz)	9.2 kW (50 Hz) 11.0 / 12.6 kW (50 / 60 Hz)
<b>Nominal motor speed</b>	3000 / 3600 min <sup>-1</sup> (50 / 60 Hz)	3000 / 3600 min <sup>-1</sup> (50 / 60 Hz)
<b>Noise level (ISO 2151)</b>	79 / 83 dB(A) (50 / 60 Hz)	80 / 86 dB(A) (50 / 60 Hz)
<b>Weight approx.</b>	290 / 320 kg (50 / 60 Hz)	325 kg (50 / 60 Hz)
<b>Dimensions (L x W x H)</b>	1310 x 515 x 545 mm	1310 x 515 x 545 mm
<b>Gas inlet / outlet</b>	G 3" / R 2"	G 3" / R 2"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[info@busch.ca](mailto:info@busch.ca) or +1 800 363 6360



CONTACT FORM



CALL NOW