

# MINK MM 0084-0182 A

Dry claw vacuum pumps



VACUUM SOLUTIONS



## Efficient

Substantial energy savings compared to conventional vacuum generators, minimized operating costs

## Nearly maintenance-free

Dry and contact-free compression

## Robust

Proven design, more than 200.000 vacuum pumps in operation

Accessories, spare parts and options

- Aqua version
- IoT Kit


# MINK MM 0084-0182 A

Dry claw vacuum pumps



VACUUM SOLUTIONS


Dimensional drawing

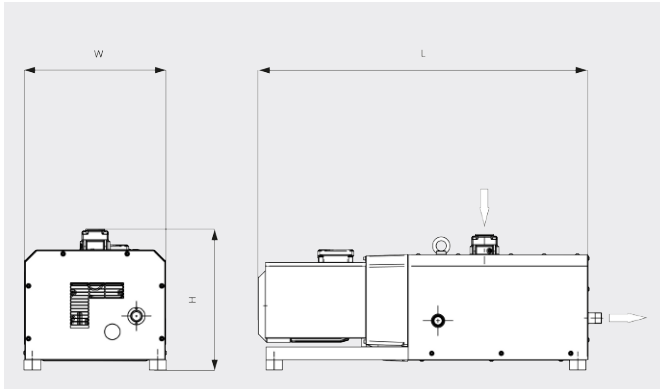

Pumping speed

Air at 20°C. Tolerance: ± 10%

— 50 Hz ..... 60 Hz

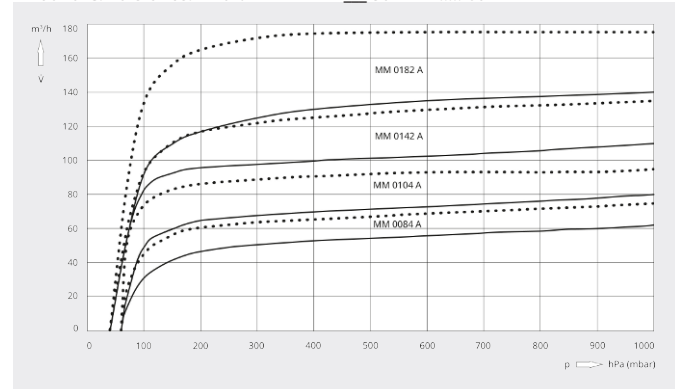

	MINK MM 0084 A	MINK MM 0104 A	MINK MM 0142 A	MINK MM 0182 A
<b>Nominal pumping speed</b>	62 / 75 m³/h (50 / 60 Hz)	80 / 95 m³/h (50 / 60 Hz)	110 / 135 m³/h (50 / 60 Hz)	140 / 175 m³/h (50 / 60 Hz)
<b>Ultimate pressure</b>	60 hPa (mbar) (50 / 60 Hz)	60 hPa (mbar) (50 / 60 Hz)	40 hPa (mbar) (50 / 60 Hz)	40 hPa (mbar) (50 / 60 Hz)
<b>Nominal motor rating</b>	1.5 / 1.7 kW (50 / 60 Hz)	2.2 / 2.4 kW (50 / 60 Hz)	3.0 / 3.4 kW (50 / 60 Hz)	3.5 / 4.8 kW (50 / 60 Hz)
<b>Nominal motor speed</b>	1500 / 1800 min <sup>-1</sup> (50 / 60 Hz)	1500 / 1800 min <sup>-1</sup> (50 / 60 Hz)	3000 / 3600 min <sup>-1</sup> (50 / 60 Hz)	3000 / 3600 min <sup>-1</sup> (50 / 60 Hz)
<b>Noise level (ISO 2151)</b>	66 / 70 dB(A) (50 / 60 Hz)	66 / 70 dB(A) (50 / 60 Hz)	75 / 79 dB(A) (50 / 60 Hz)	75 / 79 dB(A) (50 / 60 Hz)
<b>Weight approx.</b>	155 kg	155 kg	150 kg	160 kg
<b>Dimensions (L x W x H)</b>	993 x 416 x 410 mm	977 x 416 x 410 mm	971 x 416 x 410 mm	997 x 416 x 410 mm
<b>Gas inlet / outlet</b>	G 1¼" / R 1"	G 1¼" / R 1"	G 1¼" / R 1"	G 1¼" / R 1"

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[busch@busch.com.my](mailto:busch@busch.com.my) or +60 (0)3 55 25 95 00



CONTACT FORM



CALL NOW