

COBRA NC 0400/0630 B/C ECOTORQUE

Dry screw vacuum pumps



Discover all advantages of
the product series COBRA
NC ECOTORQUE

Efficient

High energy savings thanks to the variable speed drive (ECOTORQUE), Ecomode with automatic start and stop function, reduced maintenance costs, long service intervals, extended pump lifetime, efficient cooling systems

Flexible

Precise adjustment of vacuum level (pressure control) and pumping speed (speed control) to process requirements, compatible with a wide range of supply voltages, easy control and monitoring of up to eight vacuum pumps with optional ECOTORQUE Master Control

High performance

Advanced screw design, patented self-balancing screws, fast pump-down times, perfectly suited for heat treatment, coating, vacuum drying and carbon capture

Accessories


- Purge gas system
- Sealing gas supply
- Dilution gas supply
- Connection adapter to connect ISO or ASME flanges
- Non-return valve
- Exhaust gas silencer
- Air cooling
- Various sealing and coating configurations

COBRA NC 0400/0630 B/C ECOTORQUE

Dry screw vacuum pumps



Dimensional drawing

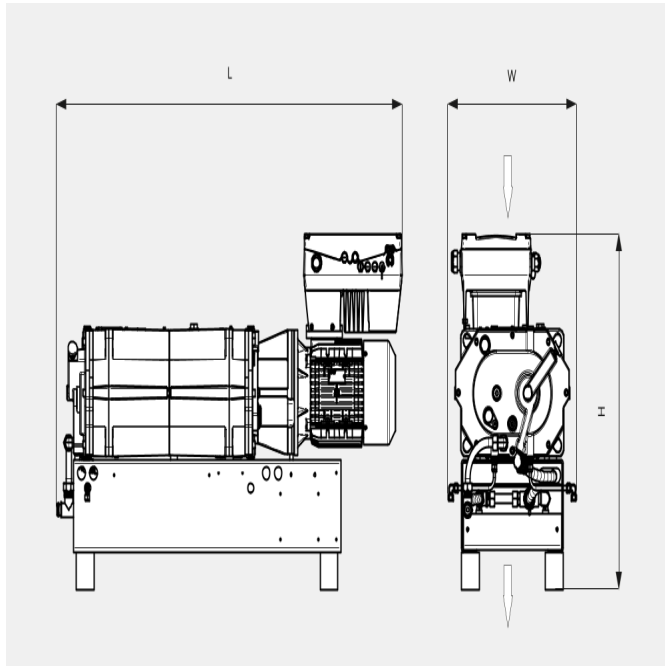

Pumping speed

Air at 20 °C. Tolerance: $\pm 10\%$

The following technical values refer to ISO 50 Hz

	COBRA NC 0400 B ECOTORQUE	COBRA NC 0630 C ECOTORQUE
Nominal pumping speed	420 m ³ /h	630 m ³ /h
Ultimate pressure	≤ 0.05 hPa (mbar)	≤ 0.01 hPa (mbar)
Nominal motor rating	9.5 kW	17.0 kW
Nominal motor speed	3600 min ⁻¹	3600 min ⁻¹
Sound pressure level (ISO 2151), KpA = 3 dB	66 dB(A)	≤ 70 dB(A)
Weight approx.	500 kg	600 kg
Dimensions (L x W x H)	1452 x 539 x 849 mm	1540 x 592 x 798 mm
Gas inlet	DN 80 PN 6	DN 100 ISO-K
Gas outlet	DN 63 ISO-K	DN 100 ISO-K

COBRA NC 0400/0630 B/C ECOTORQUE

Dry screw vacuum pumps



The following technical values refer to ISO 60 Hz

	COBRA NC 0400 B ECOTORQUE	COBRA NC 0630 C ECOTORQUE
Nominal pumping speed	420 m ³ /h	630 m ³ /h
Ultimate pressure	≤ 0.01 hPa (mbar)	≤ 0.01 hPa (mbar)
Nominal motor rating	9.5 kW	17.0 kW
Nominal motor speed	3600 min ⁻¹	3600 min ⁻¹
Sound pressure level (ISO 2151), KpA = 3 dB	69 dB(A)	≤ 75 dB(A)
Weight approx.	500 kg	600 kg
Dimensions (L x W x H)	1452 x 539 x 849 mm	1540 x 592 x 798 mm
Gas inlet	DN 80 PN 6	DN 100 ISO-K
Gas outlet	DN 63 ISO-K	DN 100 ISO-K

Do you want to know more

Please contact us!
busch@busch.com.my or +60 (0)3 55 25 95 00



Contact form



Call us now