

# R5 RA 0840 A ECOTORQUE

Oil-Lubricated Rotary Vane Vacuum Pumps



**VACUUM SOLUTIONS**

Part of the **BUSCH** GROUP



## Efficient

Up to 50% energy savings thanks to the variable speed drive (ECOTORQUE), Ecomode with automatic start and stop function

## Flexible

Precise adjustment of vacuum level (pressure control) and pumping speed (speed control) to process requirements, compatible with a wide range of supply voltages, easy control and monitoring of up to eight vacuum pumps with optional ECOTORQUE Master Control

## High performance

High pumping speed at low pressure ranges, designed for continuous operation in the rough vacuum range, best-in-class footprint performance ratio

Accessories, spare parts and options

- Single or double gas-ballast valve, manual or solenoid operation
- Various inlet filters
- Various temperature and pressure gauges
- Energy recuperation kit with water/oil heat exchanger
- Vacuum pump oils for all applications

# R5 RA 0840 A ECOTORQUE


Oil-Lubricated Rotary Vane Vacuum Pumps



**VACUUM SOLUTIONS**

Part of the **BUSCH GROUP**


Dimensional drawing

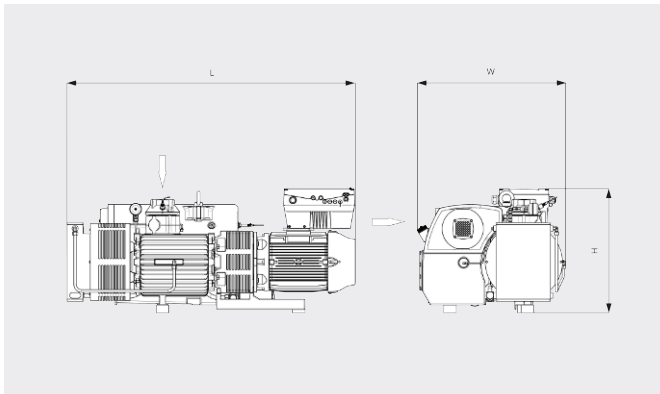

Pumping speed

Air at 20°C. Tolerance:  $\pm 10\%$

— Min. speed ..... Max. speed

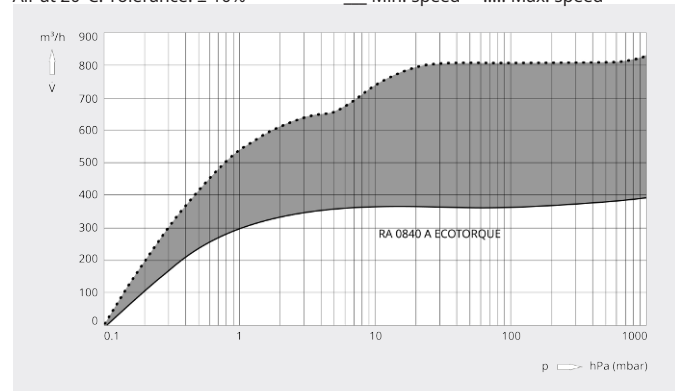

| R5 RA 0840 A ECOTORQUE                       |                                 |
|----------------------------------------------|---------------------------------|
| Nominal pumping speed                        | 390 – 840 $\text{m}^3/\text{h}$ |
| Ultimate pressure (Gas-ballast valve closed) | 0.1 hPa (mbar)                  |
| Nominal motor speed                          | 700 – 1400 $\text{min}^{-1}$    |
| Power consumption at ultimate pressure       | 4.4 – 9.3 kW                    |
| Sound pressure level (ISO 2151), KpA = 3 dB  | 80 dB(A)                        |
| Oil capacity                                 | 15 l                            |
| Weight approx.                               | 580 kg                          |
| Dimensions (L x W x H)                       | 1680 x 865 x 724 mm             |
| Gas inlet                                    | G 3"                            |

\*Gas outlet G 3" optional

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

[sales@busch.com.sg](mailto:sales@busch.com.sg) or +65 (0)64 88 08 66



CONTACT FORM



CALL NOW