

MINK MM 0084-0182 A

Dry claw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Efficient

Substantial energy savings compared to conventional vacuum generators, minimized operating costs

Nearly maintenance-free

Dry and contact-free compression

Robust

Proven design, more than 200.000 vacuum pumps in operation

MINK MM 0084-0182 A


Dry claw vacuum pumps



VACUUM SOLUTIONS


Part of the **BUSCH GROUP**

Dimensional drawing

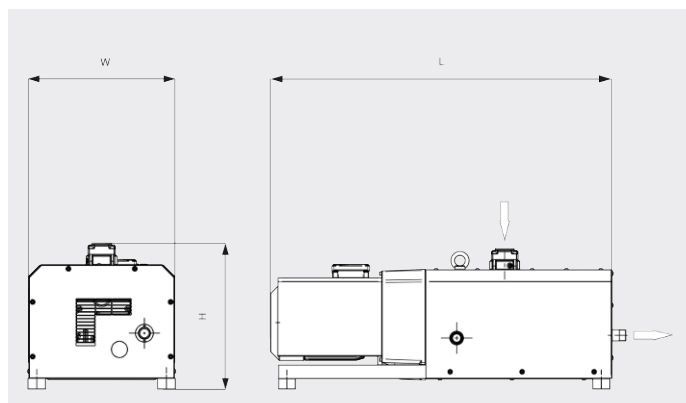

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

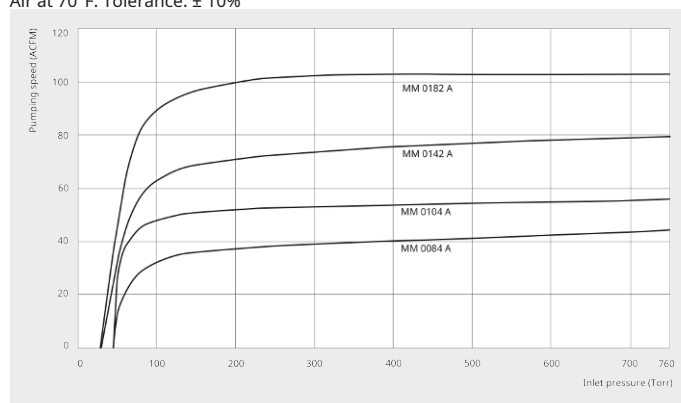

	MINK MM 0084 A	MINK MM 0104 A	MINK MM 0142 A	MINK MM 0182 A
Nominal pumping speed	44 ACFM	57 ACFM	79 ACFM	103 ACFM
Ultimate pressure	45 TORR	45 TORR	30 TORR	30 TORR
Nominal motor rating	2.0 hp	3.0 hp	4.0 hp	5.0 hp
Nominal motor speed	1800 RPM	1800 RPM	3600 RPM	3600 RPM
Sound pressure level (ISO 3744), 1 m distance, at medium load	70 dB(A)	70 dB(A)	79 dB(A)	79 dB(A)
Weight approx.	330 Lbs.	335 Lbs.	330 Lbs.	365 Lbs.
Dimensions (L x W x H)	39.5 x 16.4 x 16.1 inches	40.1 x 16.4 x 16.1 inches	39.6 x 16.4 x 16.1 inches	40.1 x 16.4 x 16.1 inches
Gas inlet / outlet	1 ¼" NPT / 1" NPT	1 ¼" NPT / 1" NPT	1 ¼" NPT / 1" NPT	1 ¼" NPT / 1" NPT

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW