

COBRA NX 0950 A ECOTORQUE

Dry screw vacuum pump



VACUUM SOLUTIONS



Efficient

High energy savings thanks to the variable speed drive (ECOTORQUE), Ecomode with automatic start and stop function, reduced maintenance costs, long service intervals, extended pump lifetime, efficient cooling systems

Flexible

Precise adjustment of vacuum level (pressure control) and pumping speed (speed control) to process requirements, compatible with a wide range of supply voltages, easy control and monitoring of up to eight vacuum pumps with optional ECOTORQUE Master Control

High performance

Advanced screw design, patented self-balancing screws, excellent running qualities, perfectly suited for vacuum drying, freeze drying, degassing, heat treatment, thermoforming and many more

Accessories, spare parts and options

- Sealing gas supply for seals used with applications particularly subject to damp or dust
- Gas-ballast valve for increased water vapor tolerance
- Exhaust gas silencer for reduced sound level
- Air-cooled version available


COBRA NX 0950 A ECOTORQUE

Dry screw vacuum pump



VACUUM SOLUTIONS


Dimensional drawing

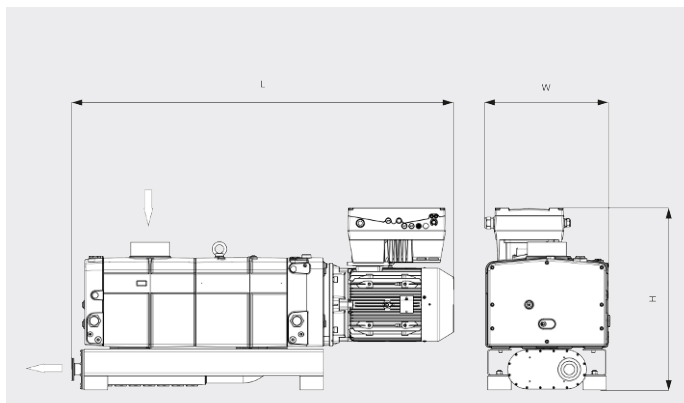

Pumping speed

Air at 70°F. Tolerance: $\pm 10\%$

■ Operating range

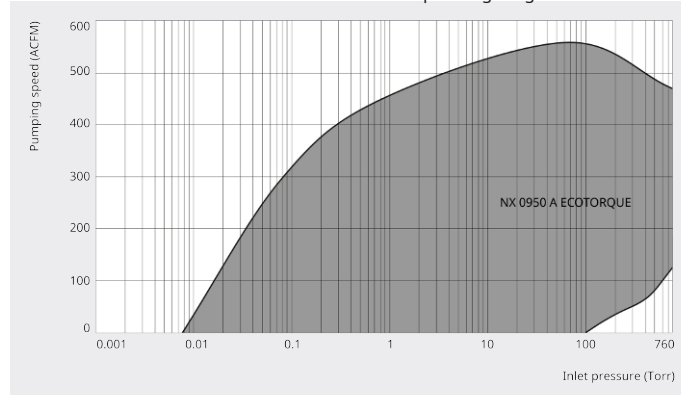

COBRA NX 0950 A	
Nominal pumping speed	560 ACFM
Ultimate pressure	≤ 0.0075 TORR
Nominal motor rating	25 HP
Nominal motor speed	4320 RPM
Sound pressure level (ISO 2151), KpA = 3 dB	75 dB(A)
Weight approx.	2000 Lbs.
Dimensions (L x W x H)	63.0 x 21.9 x 30.7 inches
Gas inlet / outlet	G3" + ISO-K DN100 / ISO-K DN100

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

info@buschusa.com or +1 757 463 7800



CONTACT FORM



CALL NOW