

COBRA DS 0600 E

Dry screw vacuum pump



VACUUM SOLUTIONS



High performance

Advanced screw design, excellent running qualities, perfectly suited for chemical vapor deposition, rapid thermal processing or atomic layer deposition

Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient indirect water cooling, high hydrogen throughput

Compact

Fit-in-place design, directly mounted canned motor

Accessories


- Tantal coating for harsh applications

COBRA DS 0600 E


Dry screw vacuum pump



Dimensional drawing

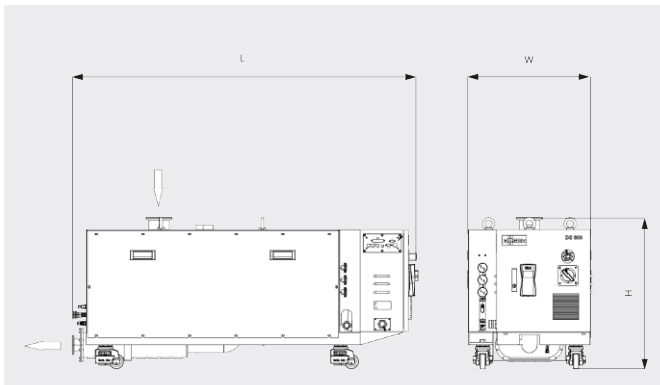

Pumping speed
Air at 20°C. Tolerance: ± 10%

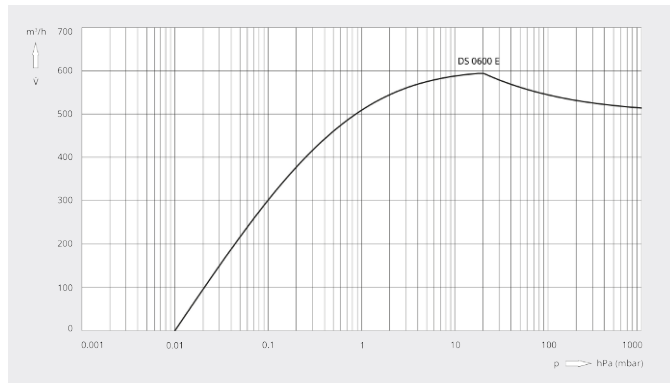

COBRA DS 0600 E	
Nominal pumping speed	600 m³/h (50 / 60 Hz)
Ultimate pressure	0.01 hPa (mbar) (50 / 60 Hz)
Nominal motor rating	15 kW (50 / 60 Hz)
Power consumption at ultimate pressure	9 kW (50 / 60 Hz)
Nominal motor speed	3600 min ⁻¹
Noise level (ISO 2151)	< 70 dB(A) (50 / 60 Hz)
Water consumption	min. 6 l/min (50 / 60 Hz)
Nitrogen consumption	0 – 200 l/min (50 / 60 Hz)
Weight approx.	745 kg
Dimensions (L x W x H)	1654 x 600 x 747 mm
Gas inlet / outlet	DN 100 / DN 63

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
sales@busch.co.za or +27 (0)11 856 0650



CONTACT FORM



CALL NOW